


Ethernet PHY

ESP32 Open IoT and IIoT Gateways (P01 & P02)

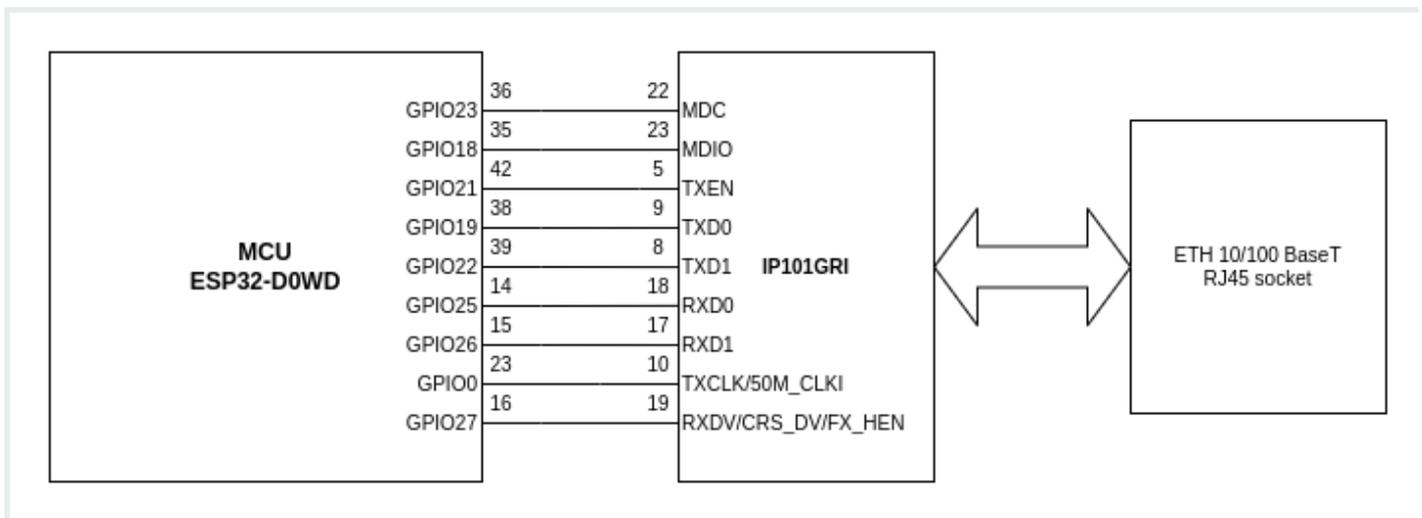

The Ethernet interface is provided by the IP101G physical layer. There is also an external board with RJ25 socket which ensures wired connection to the network.

Revision #7

Created 4 April 2024 09:34:48

Updated 26 June 2024 09:20:46 by Jan Górski