


# MicroUSB

## ESP32 Open IoT and IIoT Gateways (P01 & P02)

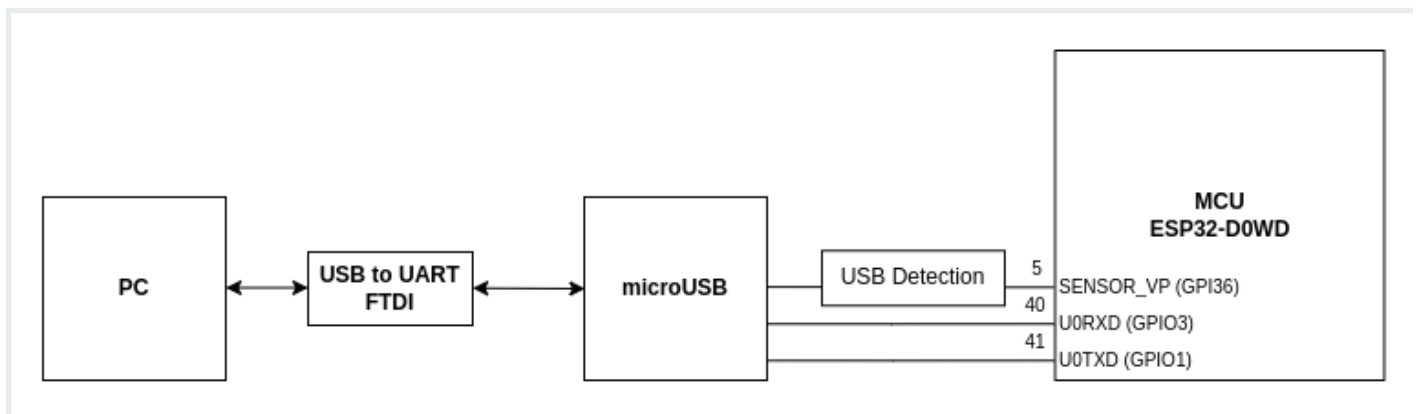

MicroUSB ensures access straight to UART interface (UART0). The Open IoT Gateway does not have inbuilt FTDI converter so an external USB to UART FTDI converter is needed to run a serial port monitor on a PC.

Revision #7

Created 4 April 2024 09:46:29

Updated 26 June 2024 09:20:46 by Jan Górski