

M-Bus Converters


C01 - C08 M-Bus Converters documentation

- [Data Sheets](#)
 - [M-Bus 10 Converters Data Sheet](#)
 - [M-Bus 60-400 Converters & Repeaters Data Sheet](#)
- [Contact Us](#)

Data Sheets

M-Bus 10 Converters Data Sheet

M-Bus Converters (C01 - C04)

<div>C01 C02 C03 C04</div> <div>Image not found or type unknown</div>	<div>Features</div> <ul style="list-style-type: none">• Serial ports RS232 and RS485• Up to 10 simultaneously connected slave devices• ESD protection for the RS232/485 data line• 3000 VDC isolation protection• Power supply: +12 to +30 VDC or 24 VAC• Transmission speed up to 9600 bps• Tx, Rx and power LED indicators• RS485 embedded termination 120 ohm• Operating temperatures: -40°C to +75°C• DIN-rail mounting• Compact size - single module format (1M)• Dimensions: 90x56.4x17.5 mm• 3 years warranty• Customization of OEM is welcomed
--	---

Introduction

C01 - C04 family products are reliable M-Bus electrical standard converters. They enable communication in master mode with up to 10 simultaneously connected slave devices. Dedicated EMC integrated circuits guarantee improved connection quality by limiting the impact of interferences typical for an industrial environment.

Specifications

Redisage PN	C01	C02	C03	C04
-------------	-----	-----	-----	-----

Converter ports	Serial	1 x passive RS232	1 x active RS232	1 x RS485	1 x active RS232/RS485
	M-Bus	1 x M-Bus master with up to 10 x slaves			
Power	Voltage	12-30 VDC / 24 VAC			
	Power	< 1 W			
Frame ground connection		yes			
Serial interface	RS232	TxD, RxD, GND			
	RS485	A, B			
	M-Bus	MBus+, MBus -			
3000 VDC isolation side		N/A	RS232	RS485	RS232/RS485
1000 VDC isolation side		RS232	N/A		
Baud rate		up to 9600 bps			
LED indicators		communication Tx, Rx, power			
		RS232 OK	N/A		
RS485 termination		120 ohm manually enabled			
Connector	RS232	3-pin terminal block max. 2.5 mm ² wire			
	RS485	3-pin terminal block max. 2.5 mm ² wire			
	Power	3-pin terminal block max. 2.5 mm ² wire			
	M-Bus	3-pin terminal block max. 2.5 mm ² wire			
Transmission distance	RS485	max. 1,200 m at 9.6 kbps; max. 400 m at 115.2 kbps (Belden 9841 2P twisted-pair cable, if different cables are used, the transmission distance may change)			
	RS232	max. 15 m at 115.2 kbps			


M-Bus	see: M-Bus max. transmission distance		
Mounting and enclosure	DIN rail, plastic PA - UL 94 V0, black/green		
Temperatures	-40°C to +75°C operating and storage		
Humidity	10 - 90% RH, non-condensing		
ESD protection	±4 kV contact discharge / ±8 kV air discharge		
Certification	CE, RoHS		

M-Bus max. transmission distance

image.webp or type unknown


Variants

C01 - MBus10 Converter to RS232

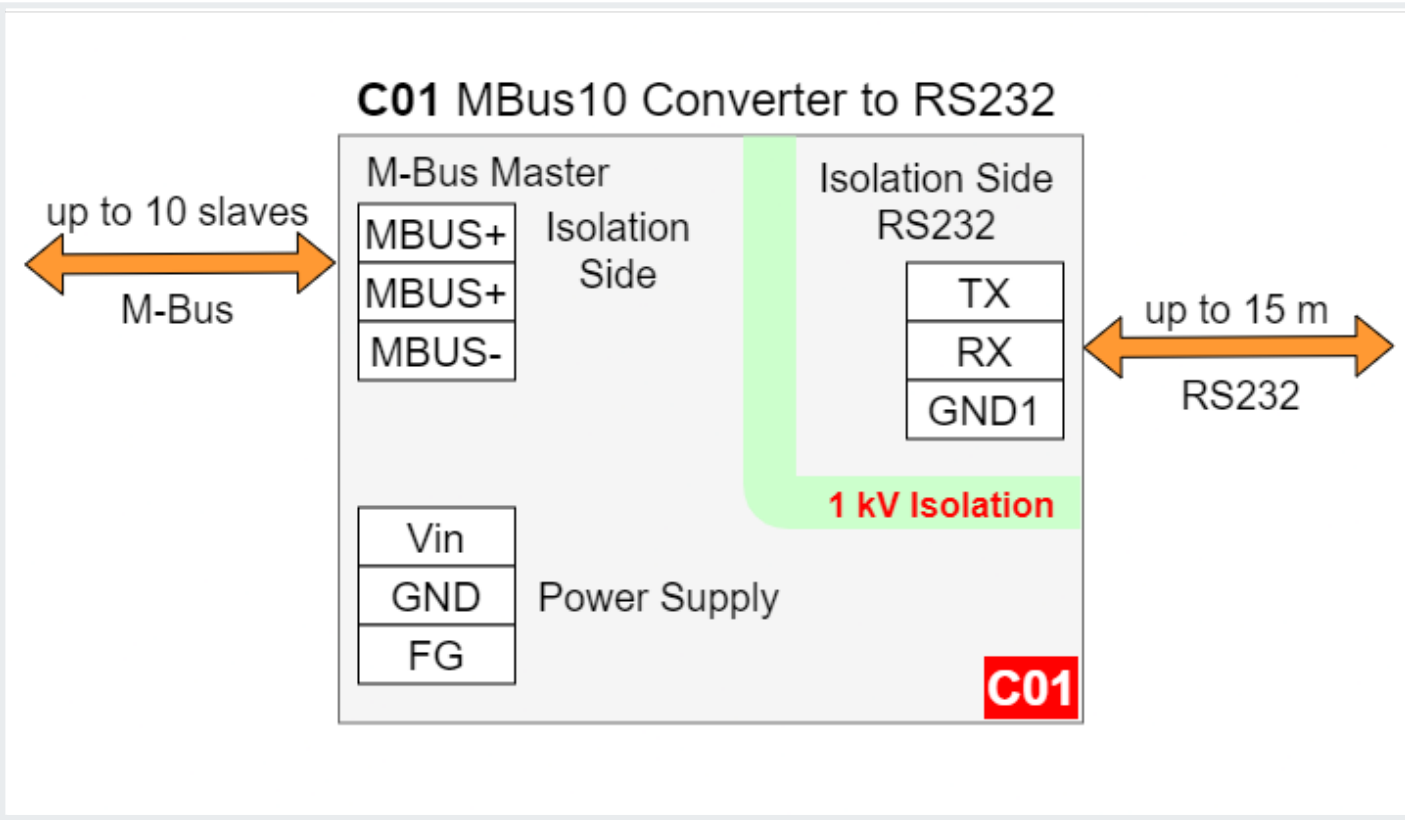


C02 - MBus10 Converter with active RS232 interface

C02 MBus10 Converter to active RS232

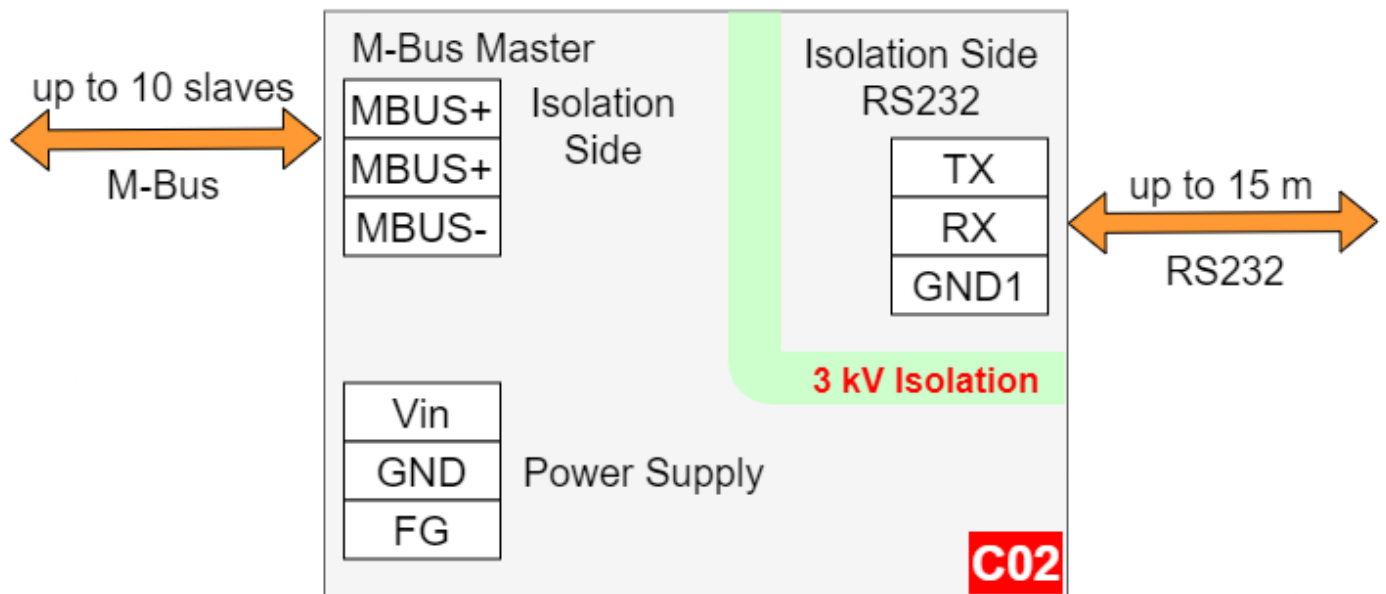


C03 - MBus10 Converter to RS485

C03 Mbus10 Converter to RS485

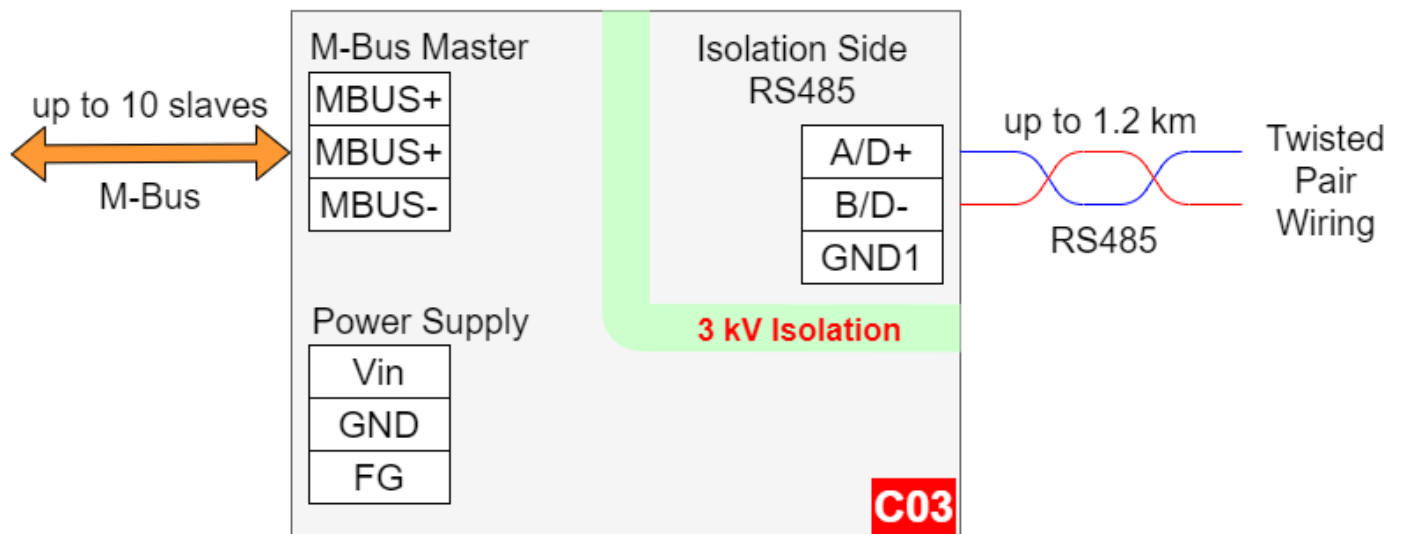

C04 - MBus10 Converter to RS232/RS485 with active RS232 interface

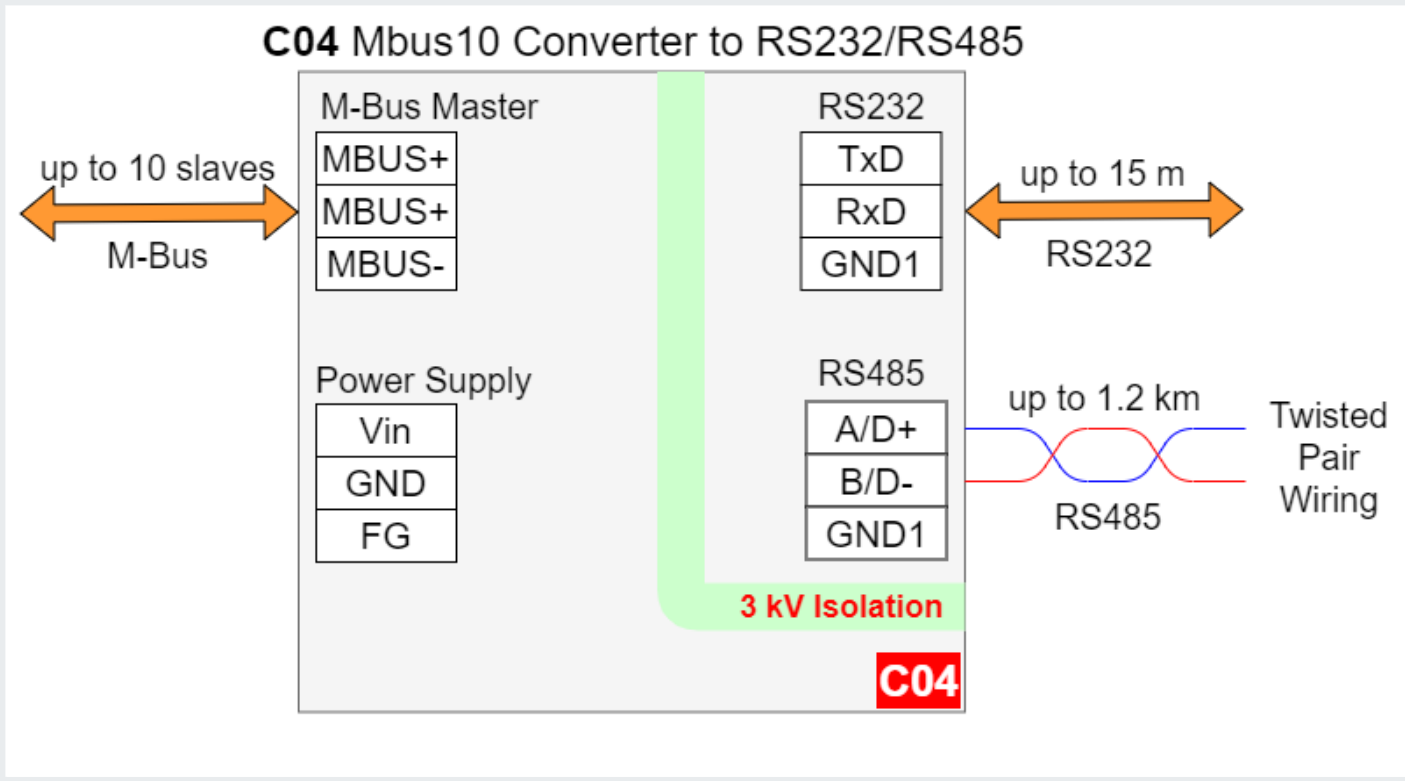

Frame ground FG

Electronic circuits are constantly prone to electrostatic discharge ESD. Redisage Electronics modules feature a design for the frame ground terminal block FG. The frame ground provides a path for bypassing ESD, which provides enhanced static protection ESD abilities and ensures the module is more reliable. Connecting FG terminal block to the earth ground will bypass the ESD disturbances outside the device so will provide a better level of protection against ESD.

Frame Ground FG connection reference drawing is provided below.




If earth ground is not available FG can be left floating or it can be connected with the power supply GND.

Pin assignments

<p>C01</p> <p>Image (1).webp or type unknown</p>	<p>C02</p> <p>Image (2).webp or type unknown</p>
<p>C03</p> <p>Image (3).webp or type unknown</p>	<p>C04</p> <p>Image (4).webp or type unknown</p>

Enclosure dimensions

1U Module Enclosure
98 x 17.5 x 56.4
Units: mm

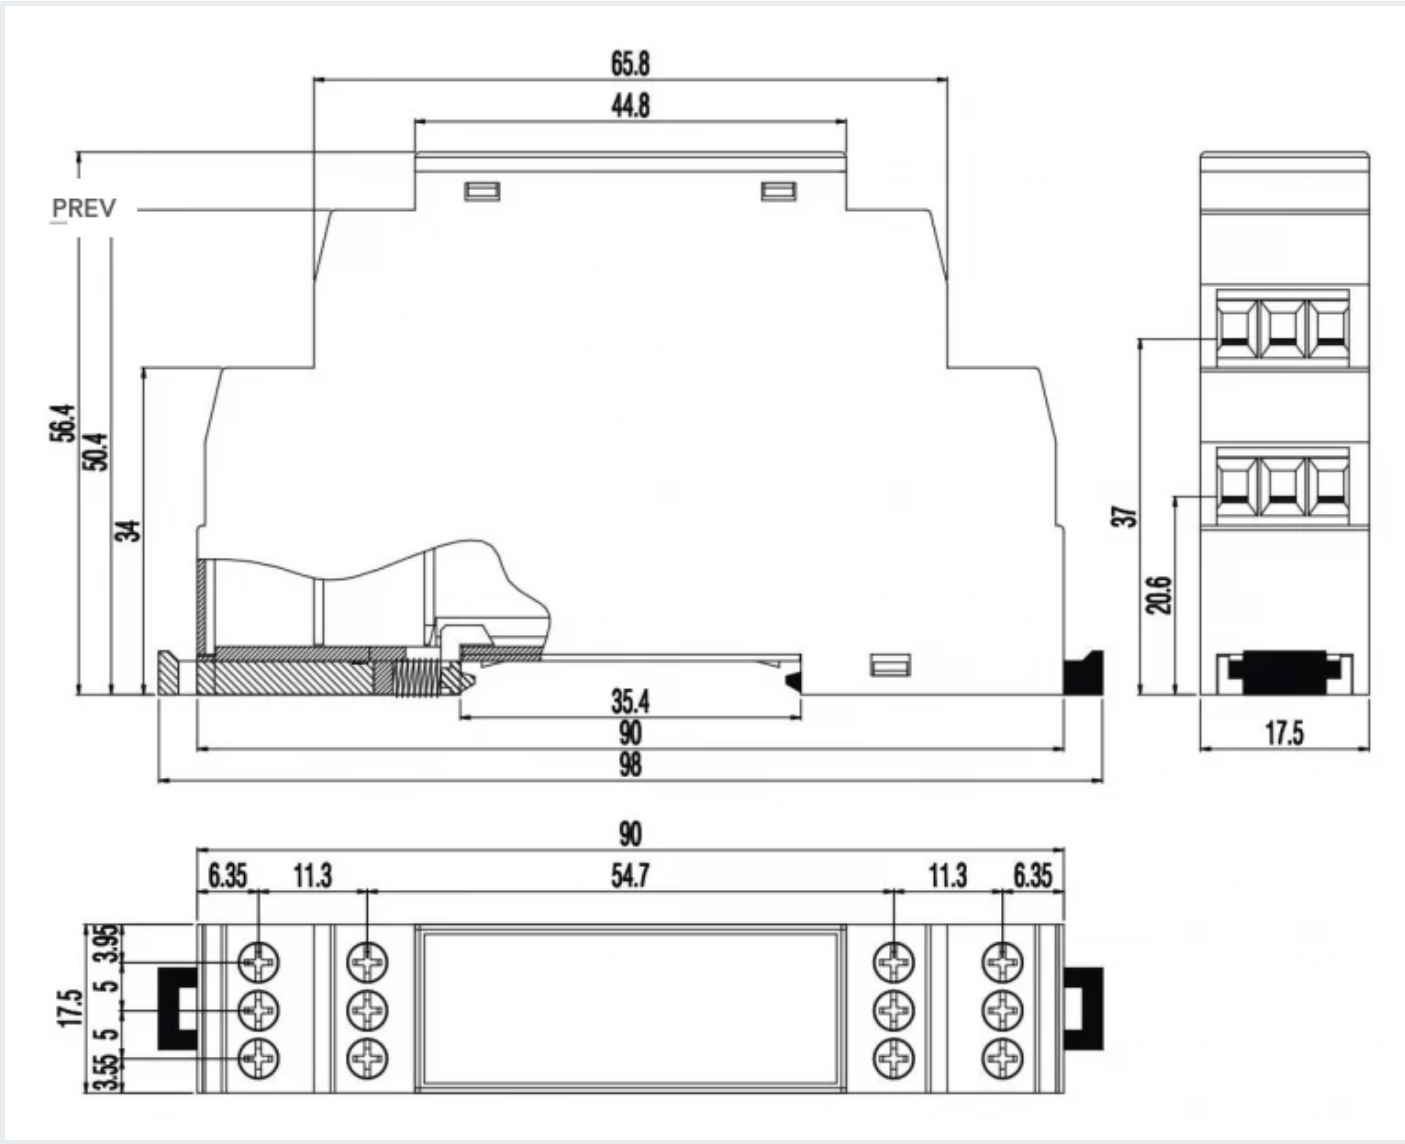

Additional notes

Related information and links		
Ordering information	Accessories	Similar products

Products family sample photo



<https://redisage.com>

DISCLAMER NOTES


ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Datasheet-ID:

SC-D

M-Bus 60-400 Converters & Repeaters Data Sheet

M-Bus Converters (C05 - C08)

C05 C06 C07 C08	Features
	<ul style="list-style-type: none">• Serial ports RS232 and RS485• Up to 400 simultaneously connected slave devices• ESD protection for the RS232/485 data line• 3000 VDC isolation protection• Power supply: +12 to +30 VDC or 24 VAC• Transmission speed up to 9600 bps• Tx, Rx, power and M-Bus load LED indicators• RS485 embedded termination 120 ohm• Operating temperatures: -40°C to +60°C• DIN-rail mounting• Dimensions: 90x56.4x35,6 mm• 3 years warranty• Customization of OEM is welcomed

Introduction

C05 - C08 is a family of products that are reliable M-Bus electrical standard converters. They enable communication in master mode with many (60-400) simultaneously connected slave devices and can work as M-Bus repeaters letting to broaden the range of the interface, while simultaneously making the quality better and supporting the safety of the communication. Dedicated EMC integrated circuits guarantee improved connection quality by limiting the impact of interference typical for an industrial environment.

Specifications

Redisage PN	C05	C06	C07	C08
-------------	-----	-----	-----	-----

Converter ports	Serial	1 x RS232 & 1 x RS485			
	M-Bus master	up to 60 slaves	up to 120 slaves	up to 200 slaves	up to 400 slaves
	M-Bus slave	1 x M-Bus slave			
Power	Voltage	12-30 VDC / 24 VAC			
	Max. power	5 W	8 W	15 W	30 W
Frame ground connection		yes			
Serial interface	RS232	TxD, RxD, GND			
	RS485	A, B			
3000 VDC isolation side		RS232, RS485, M-Bus slave			
Baud rate		up to 9600 bps			
LED indicators		communication Tx, Rx, power, M-Bus load, error			
RS485 termination		120 ohm manually enabled			
Connector	RS232	3-pin terminal block max. 2.5 mm ² wire			
	RS485	3-pin terminal block max. 2.5 mm ² wire			
	Power	3-pin terminal block max. 2.5 mm ² wire			
	M-Bus	3-pin terminal block max. 2.5 mm ² wire			
Transmission Distance	RS485	max. 1,200 m at 9.6 kbps; max. 400 m at 115.2 kbps (Belden 9841 2P twisted-pair cable, if different cables are used, the transmission distance may change)			
	RS232	max. 15 m at 115.2 kbps			
	M-Bus	see: M-Bus max. transmission distance			
Mounting and enclosure		DIN rail, plastic PA - UL 94 V0, black/green			

Temperatures	-40°C to +60°C operating and storage
Humidity	10 - 90% RH, non-condensing
ESD protection	±4 kV contact discharge / ±8 kV air discharge
Certification	CE, RoHS


M-Bus max. transmission distance

 image.webp or type unknown

Variants

C05 - C08 M-Bus Converter with M-Bus repeater functionality

C05-C08 M-Bus Converter with M-Bus Reapeater functionality

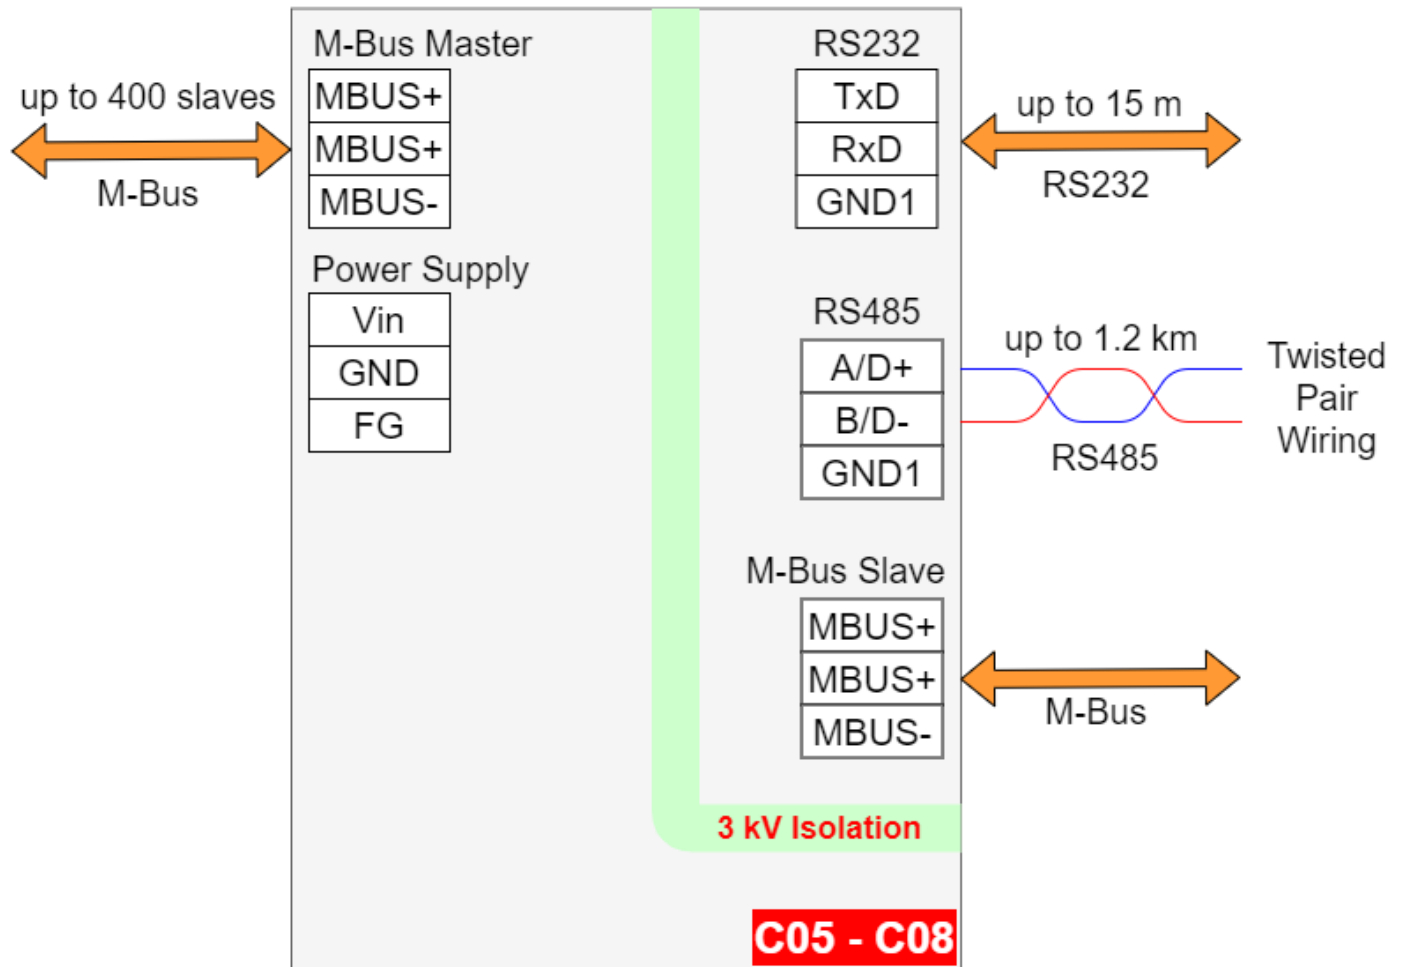

Frame ground FG

Electronic circuits are constantly prone to electrostatic discharge ESD. Redisage Electronics modules feature a design for the frame ground terminal block FG. The frame ground provides a path for bypassing ESD, which provides enhanced static protection ESD abilities and ensures the module is more reliable. Connecting FG terminal block to the earth ground will bypass the ESD disturbances outside the device so will provide a better level of protection against ESD.

Frame Ground FG connection reference drawing is provided below.




If earth ground is not available FG can be left floating or it can be connected with the power supply GND.

Pin assignments

C05 Image (7).webp or type unknown	C06 Image (8).webp or type unknown
C07 Image (9).webp or type unknown	C08 Image (10).webp or type unknown

Enclosure dimensions


2U Module Enclosure
98 x 35.8 x 56.4
Units: mm

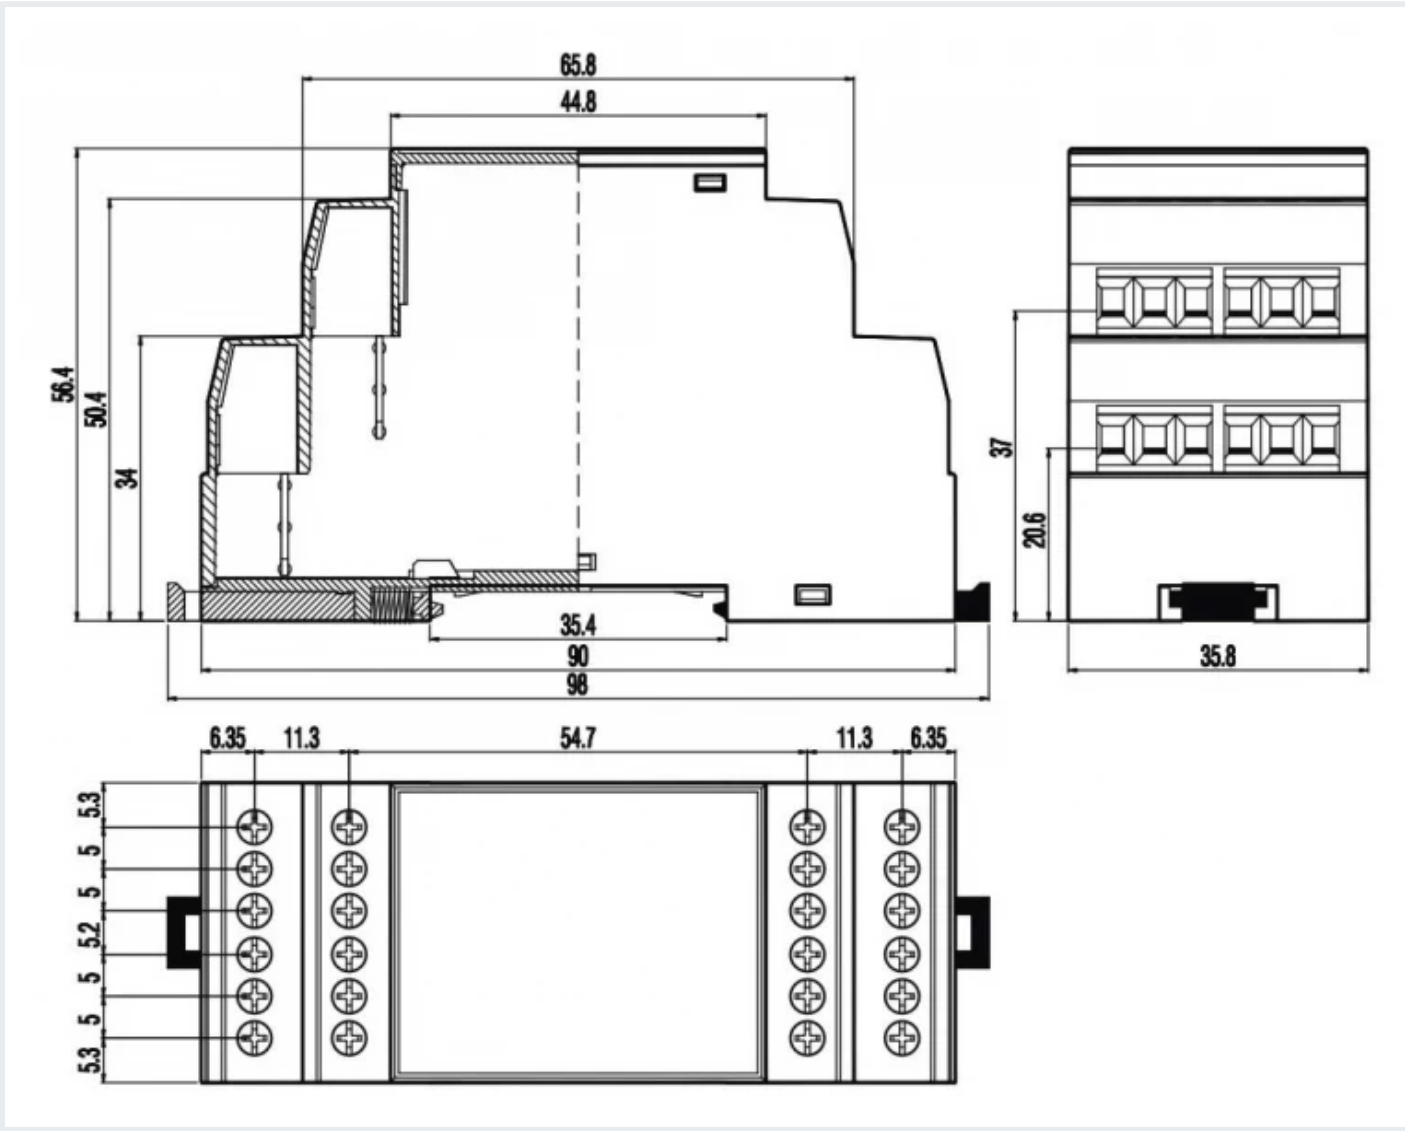

Additional notes

Related information and links		
Ordering information	Accessories	Similar products

Products family sample photo

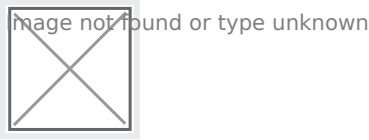

<https://redisage.com>

DISCLAMER NOTES

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Datasheet-ID:

SC-D

Contact Us

- [Main web page](#)
- [Facebook](#)
- E-mail:
online@redisage.com
- Phone number:
+48 71 70 00 140
- Address:
NSG 4L Sp. z o.o.
ul. Trzy Lipy 3B
80-172 Gdańsk
(POLSKA)
- [More information](#)