


Introduction

Modbus Ethernet Wi-Fi Gateways (G11 - G13)

Modbus gateways allow data transmission between LAN hosts, Wi-Fi hosts, and serial devices by converting Modbus protocols (Modbus TCP and Modbus RTU/ASCII). They are intended to be used in industrial networks especially in the field of Industry 4.0 but not only. Apart from extending the capabilities of industrial devices, they can be also adapted up to user's requirements and needs.

Transmission is carried out by two modes: Gateway and Router. In the Gateway mode, the port is used to communicate with Slave devices, but in the Router mode with Master devices. It is also possible to set up different modes on every port. Block diagrams below describe how each of these modes works.

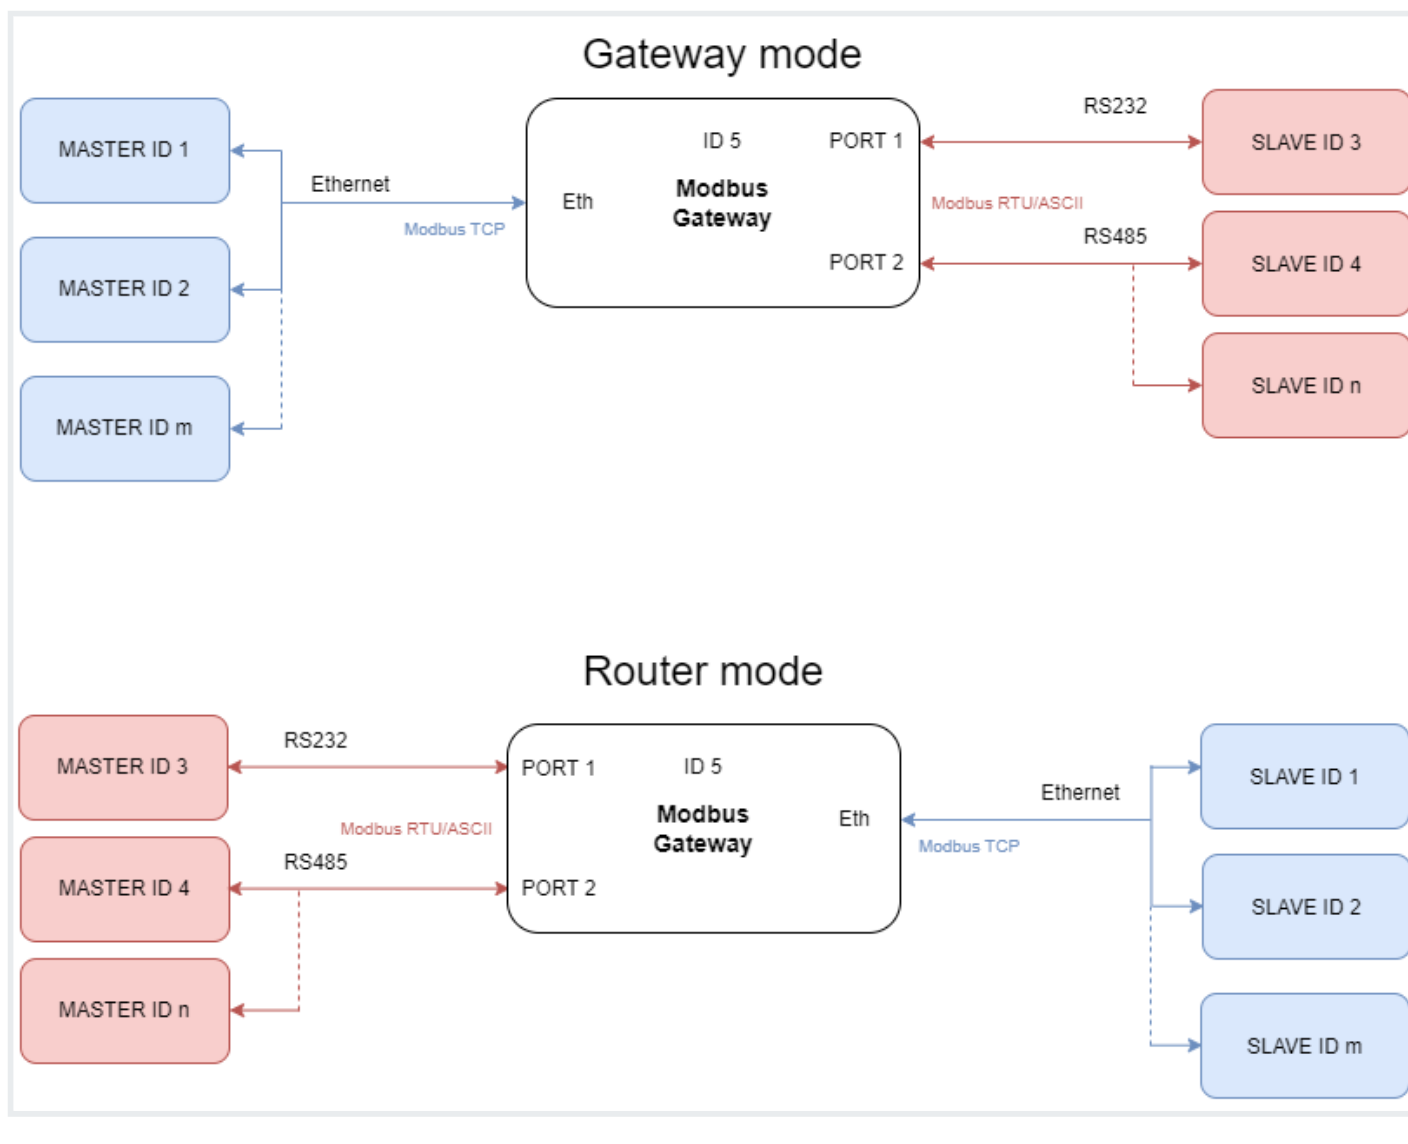

Revision #1

Created 2 July 2025 09:17:21 by Michał Grabski

Updated 2 July 2025 09:45:57 by Michał Grabski