

# RS232 RS485 Repeaters

**R01 - R04 RS232 RS485 Repeaters documentation**

- [Data Sheet](#)
- [Contact Us](#)

# Data Sheet

## RS232 RS485 Repeaters (R01 - R04)

<div>R01 R02 R03 R04</div> <div>Image (4).webp or type unknown</div>	<div>Features</div> <ul style="list-style-type: none"><li>• Automatic RS485 direction control</li><li>• ESD protection for the RS232/485 data line</li><li>• Power supply: +12 to +30 VDC or 24 VAC</li><li>• 3000 VDC isolation protection on the RS485 side</li><li>• Transmission speed up to 115200 bps</li><li>• Tx, Rx and power LED indicators</li><li>• RS485 embedded termination 120 ohm</li><li>• Operating temperatures: -40°C to +75°C</li><li>• DIN-rail mounting</li><li>• Compact size - single module format (1M)</li><li>• Dimensions: 90x56.4x17.5 mm</li><li>• 3 years warranty</li><li>• Customization of OEM is welcomed</li></ul>
----------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## Introduction

The R01 provides 3-way optical isolation between both RS485 sides and power supply. It can also be used as a repeater to extend the transmission of an existing network. Additionally, an RS485 system can be expanded beyond the 256 nodes limitation imposed by the standard.

The R02 is exactly the same as the R01, except for the isolation range. The R02 has one RS485 side isolation.

The R03 separator module provides a complete full-duplex, 3-way electrical isolation channel between two RS232 devices. This isolation is an important consideration if a system uses different power sources, has noisy signals or must operate at different ground potentials.

The R04 is exactly the same as the R03, except for the isolation range. The R04 has one RS232 side isolation.


# Specifications

Redisage PN		R01	R02	R03	R04
Repeater ports		2 x RS485		2 x RS232	
Power	Voltage	12-30 VDC / 24 VAC	12-30 VDC	12-30 VDC / 24 VAC	12-30 VDC
	Power	< 1 W			
Frame ground protection		yes			
Serial interface	RS232	N/A		TxD, RxD, GND	
	RS485	A, B		N/A	
3000 VDC isolation		3-way	single side	3-way	single side
Baud rate		up to 115200 bps			
LED indicators		communication Tx, Rx and power			
RS485 Termination		120 ohm manually enabled		N/A	
Connector	RS232	N/A		3-pin terminal block max. 2.5 mm <sup>2</sup> wire	
	RS485	3-pin terminal block max. 2.5 mm <sup>2</sup> wire		N/A	
	Power	3-pin terminal block max. 2.5 mm <sup>2</sup> wire			
Transmission distance	RS485	max. 1,200 m at 9.6 kbps; max. 400 m at 115.2 kbps (Belden 9841 2P twisted-pair cable, if different cables are used, the transmission distance may change)			
	RS232	max. 15 m at 115.2 kbps			
Mounting and enclosure		DIN rail, plastic PA - UL 94 V0, black/green			
Temperatures		-40°C to +75°C operating and storage			


Redisage PN	R01	R02	R03	R04
Humidity	10 - 90% RH, non-condensing			
ESD protection	±4 kV contact discharge / ±8 kV air discharge			
Certification	CE, RoHS			

# Variants


## R01 - THREE-WAY Isolated RS485 Repeater

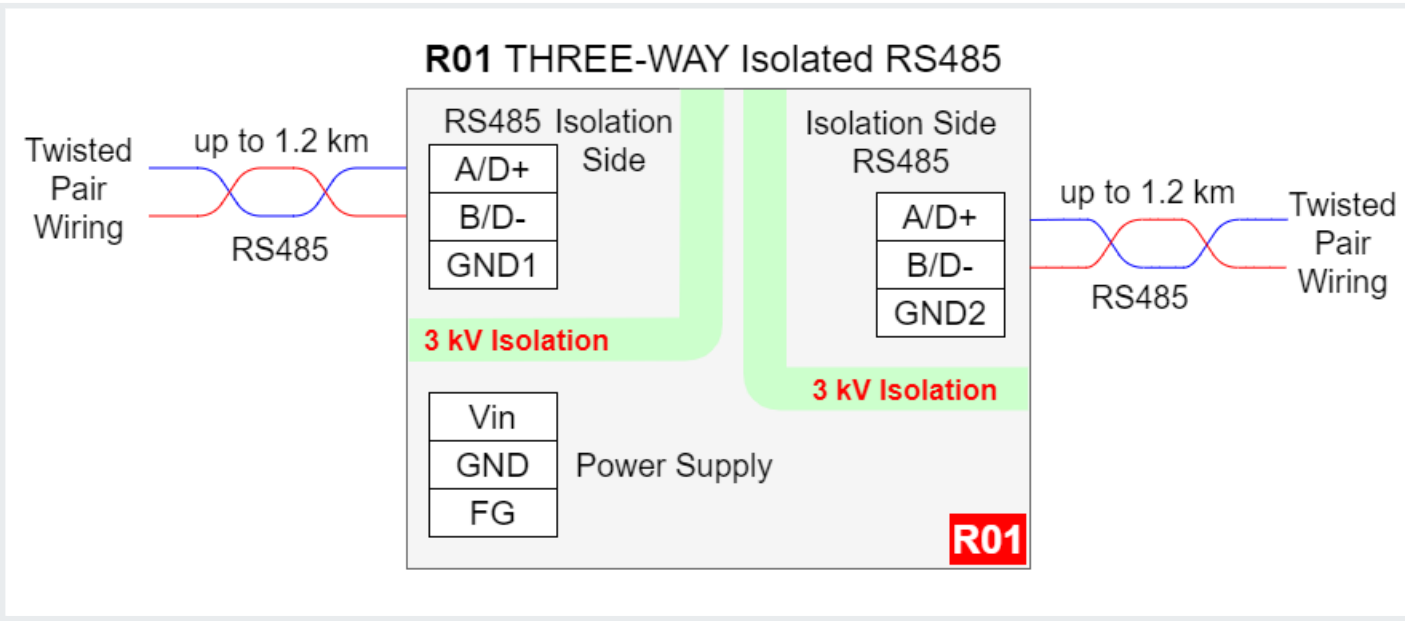


## R02 - Isolated RS485 Repeater

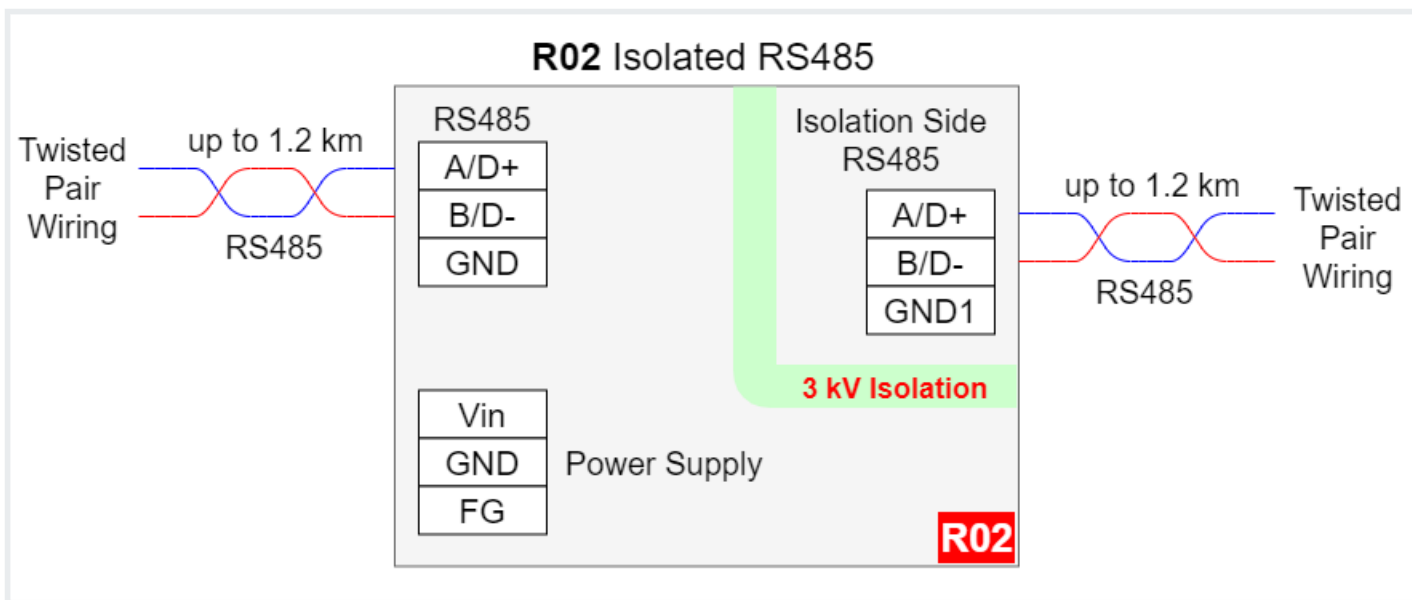

### R03 - 3-way Isolated RS232 Separator Repeater

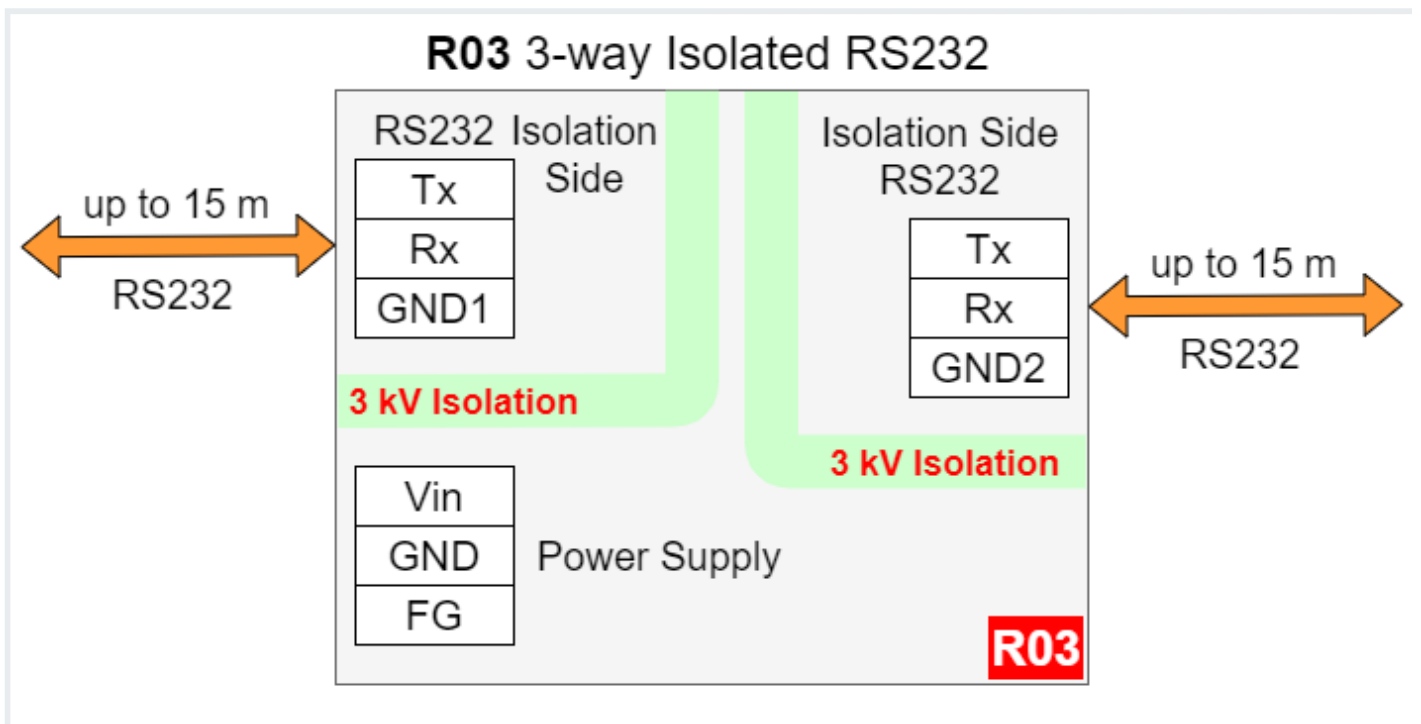

### R04 - Isolated RS232 Separator Repeater

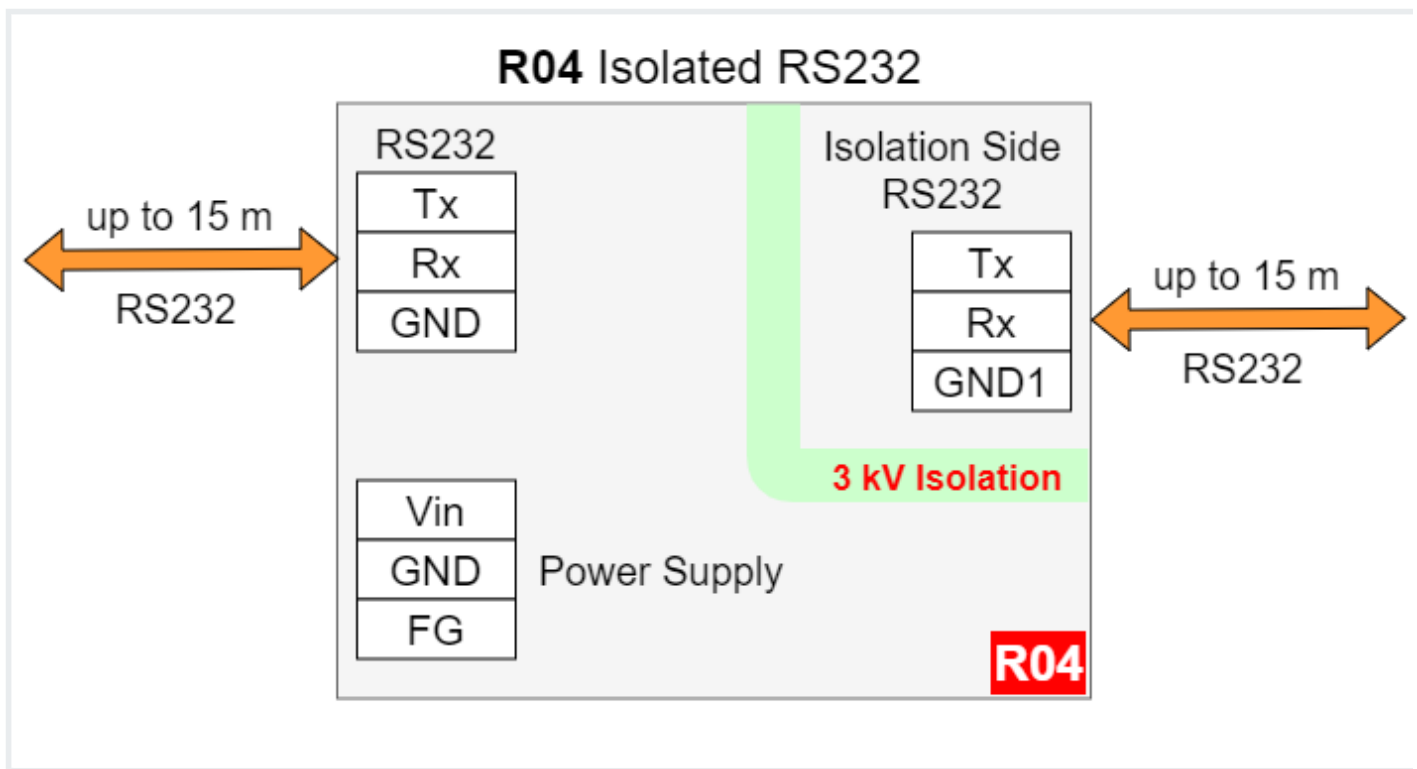

## Frame ground FG

Electronic circuits are constantly prone to electrostatic discharge ESD. Redisage Electronics modules feature a design for the frame ground terminal block FG. The frame ground provides a path for bypassing ESD, which provides enhanced static protection ESD abilities and ensures the module is more reliable. Connecting FG terminal block to the earth ground will bypass the ESD disturbances outside the device so will provide a better level of protection against ESD.

Frame Ground FG connection reference drawing is provided below.




If earth ground is not available FG can be left floating or it can be connected with the power supply GND.

## Pin assignments

<div>R01</div> <div>Image (1).webp</div> <div>Image (1).webp or type unknown</div>	<div>R02</div> <div>Image (1).webp</div> <div>Image (1).webp or type unknown</div>
<div>R03</div> <div>Image (2).webp</div> <div>Image (2).webp or type unknown</div>	<div>R04</div> <div>Image (3).webp</div> <div>Image (3).webp or type unknown</div>

# Enclosure dimensions

1U Module Enclosure  
98 x 17.5 x 56.4  
Units: mm

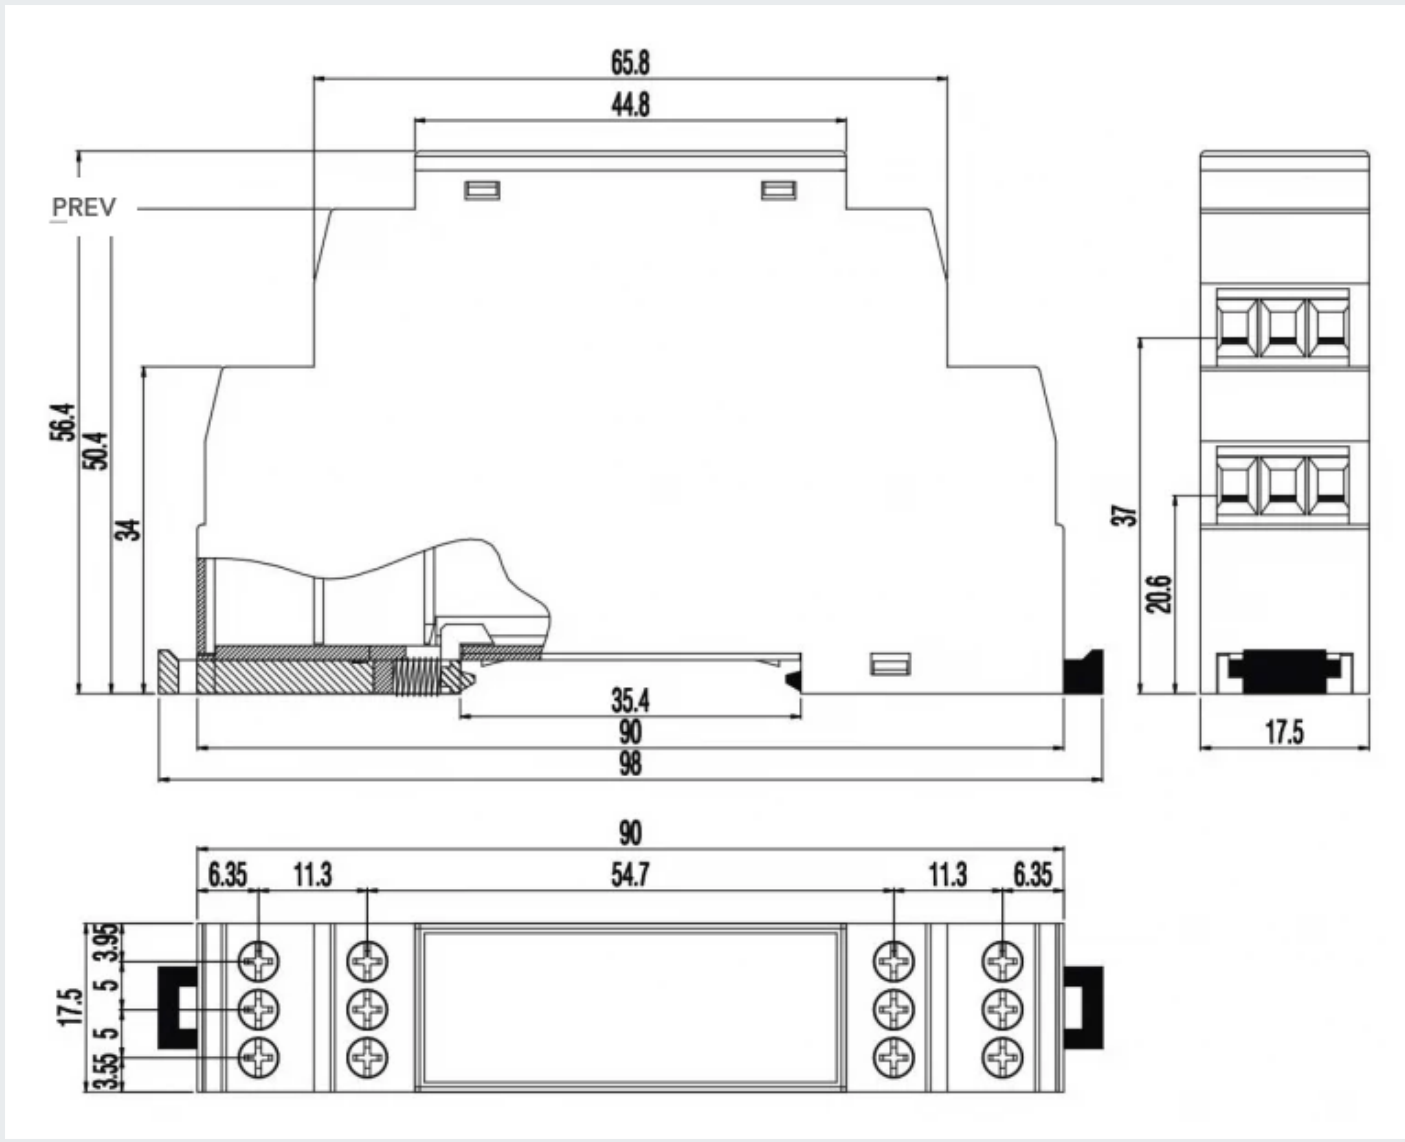

# Additional notes

Related information and links		
<a href="#">Ordering information</a>	<a href="#">Accessories</a>	<a href="#">Similar products</a>

# Products family sample photo



<https://redisage.com>

## DISCLAIMER NOTES

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE



TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

**Datasheet-ID:**

SR-D

# Contact Us

- [Main web page](#)
- [Facebook](#)
- E-mail:  
[online@redisage.com](mailto:online@redisage.com)
- Phone number:  
+48 71 70 00 140
- Address:  
NSG 4L Sp. z o.o.  
ul. Trzy Lipy 3B  
80-172 Gdańsk  
(POLSKA)
- [More information](#)