

Data Sheet

RS485 HUBs (H01 - H03)

H01 H02 H03



Features

- Isolated RS485 1:3 HUB
- ESD protection for the RS485 data line
- Power supply: +12 to +30 VDC or 24 VAC
- 3000 VDC isolation protection
- Transmission speed up to 115200 bps
- Tx, Rx and power LED indicators
- RS485 embedded termination 120 ohm
- Operating temperatures: -40°C to +75°C
- DIN-rail mounting
- Compact size - single module format (1M)
- Dimensions: 90x56.4x22.5 mm
- 3 years warranty
- Customization of OEM is welcomed

Introduction

The products from the H01-H03 family are reliable RS485 signal hubs made to work with variable transmission speeds. They allow flexible branching of the 1:3 interface while simultaneously protecting the attached devices thanks to internal 3 kV/DC galvanic isolation. Additionally, dedicated EMC protections will improve transmission quality and limit the impact of interference typical for an industrial environment.

Specifications


Redisage PN	H01	H02	H03			
Input	1 x RS485 channel; Data+, Data-					
Output	3 x RS485 channels; Data+, Data-					

Redisage PN		H01	H02	H03			
Power	Voltage	12-30 VDC / 24 VAC	12-30 VDC				
	Power	< 1 W					
Frame ground protection		yes					
3000 VDC isolation		3-way	branched side	main side			
Baud rate		up to 115200 bps					
LED indicators		communication Tx, Rx and power					
RS485 termination		120 ohm manually enabled					
Connector	RS485	8-pin terminal block max. 2.5 mm ² wire					
	Power	3-pin terminal block max. 2.5 mm ² wire					
Transmission distance	RS485	max. 1,200 m at 9.6 kbps; max. 400 m at 115.2 kbps (Belden 9841 2P twisted-pair cable, if different cables are used, the transmission distance may change)					
Mounting and enclosure		DIN rail, plastic PA - UL 94 V0, black/green					
Temperatures		-40°C to +75°C operating and storage					
Humidity		10 - 90% RH, non-condensing					
ESD protection		±4 kV contact discharge / ±8 kV air discharge					
Certification		CE, RoHS, EMC, LVD					
Norms		61000-6-2 - Immunity standard for industrial environments 61000-6-4 - Emission standard for industrial environments					


Variants

H01 - THREE-WAY Isolated RS485 HUB


H01 THREE-WAY Isolated RS485 HUB

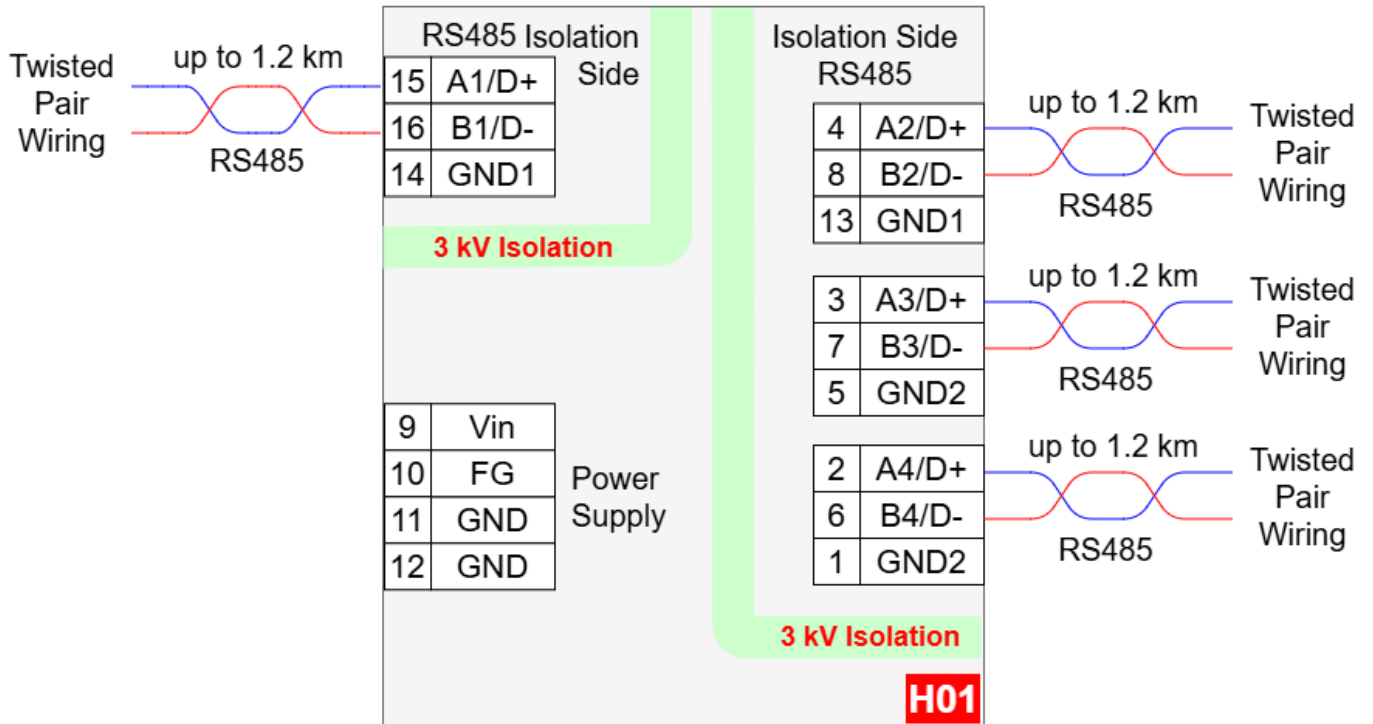

H02 - Branched Side Isolated RS485 HUB

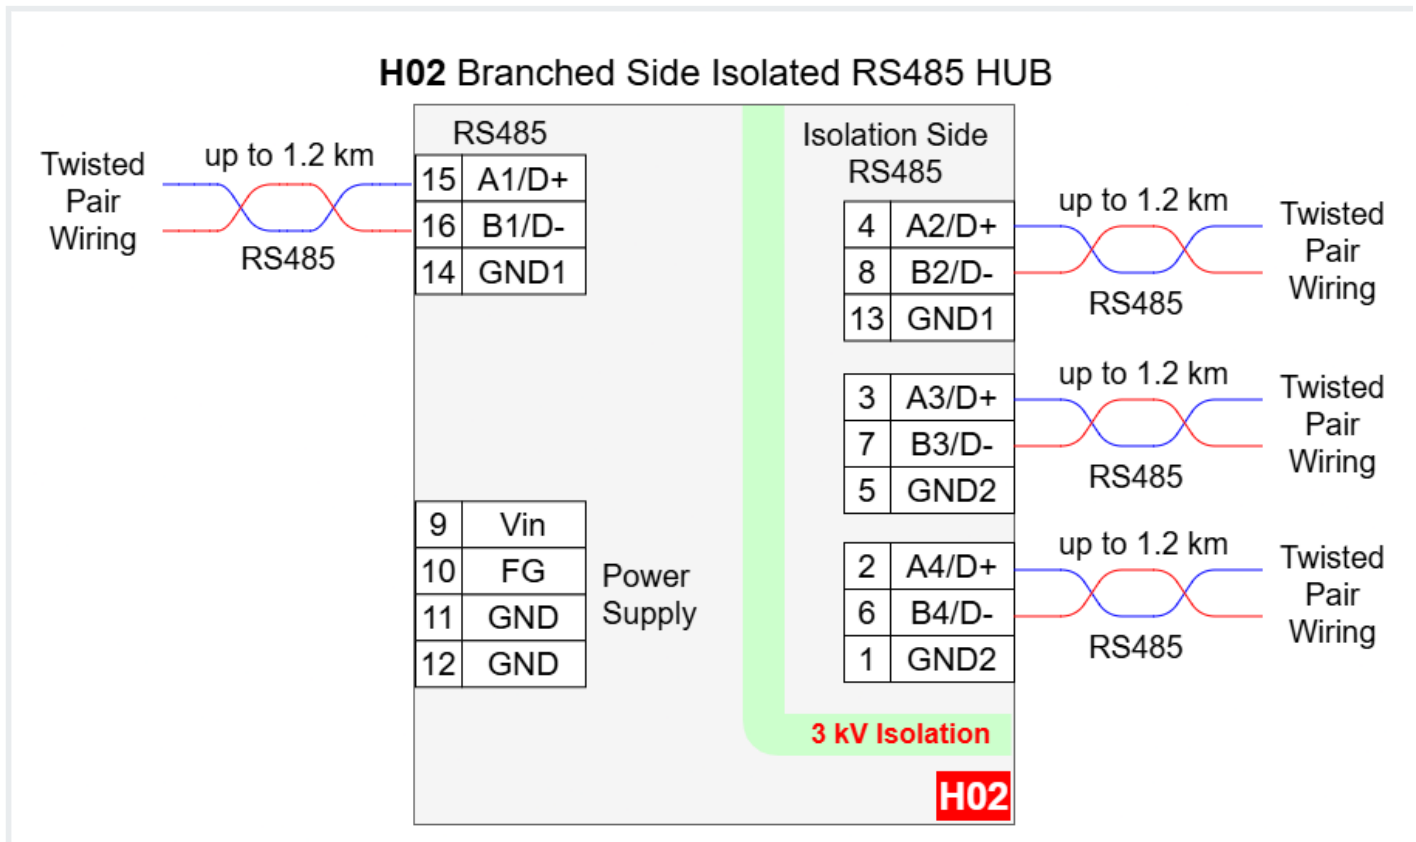


H03 - Main Side Isolated RS485 HUB

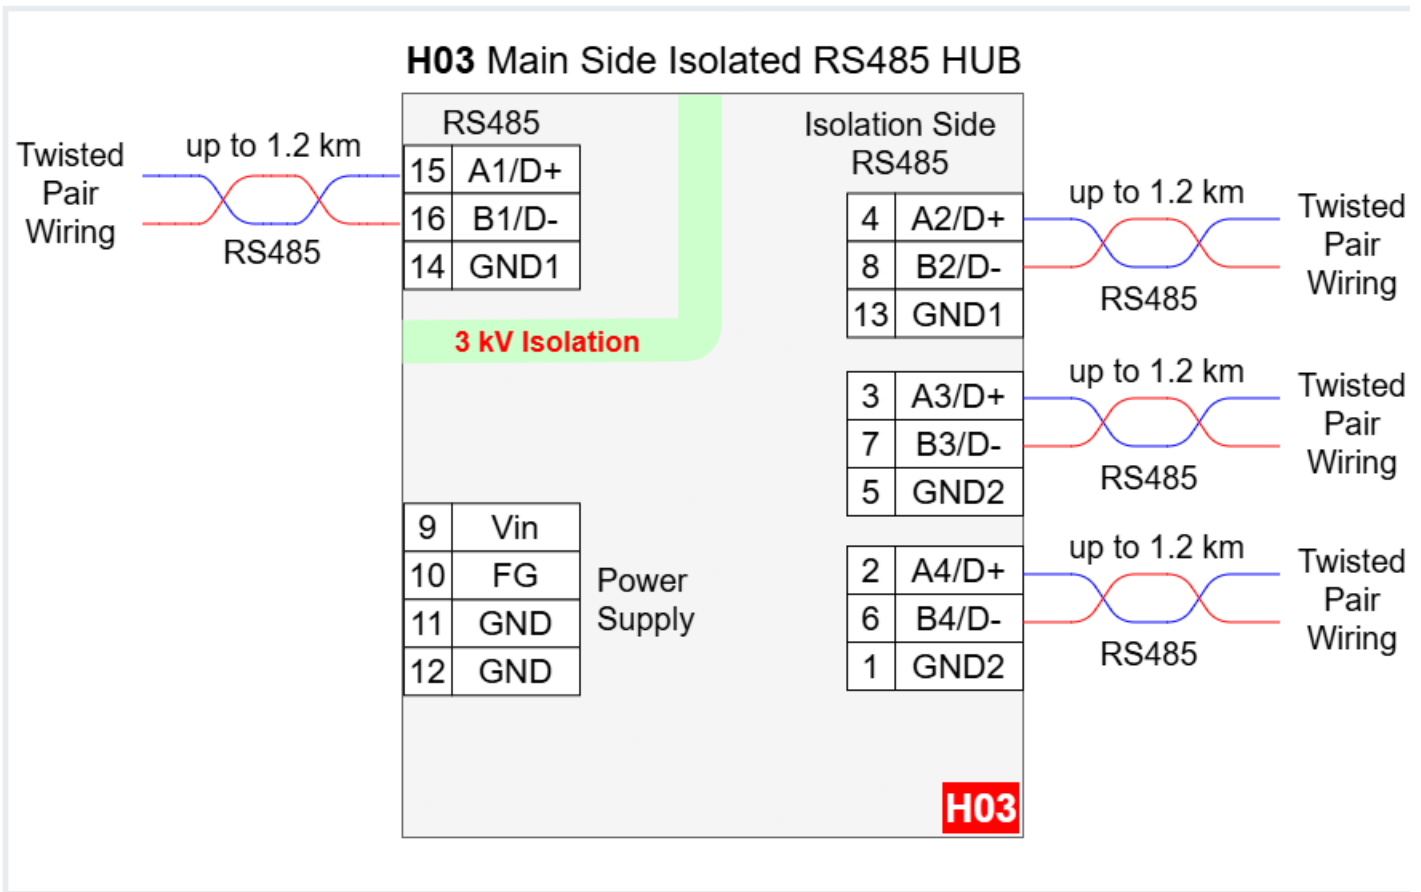

Frame ground FG

Electronic circuits are constantly prone to electrostatic discharge ESD. Redisaige Electronics modules feature a design for the frame ground terminal block FG. The frame ground provides a path for bypassing ESD, which provides enhanced static protection ESD abilities and ensures the module is more reliable. Connecting FG terminal block to the earth ground will bypass the ESD disturbances outside the device so will provide a better level of protection against ESD.

Frame Ground FG connection reference drawing is provided below.

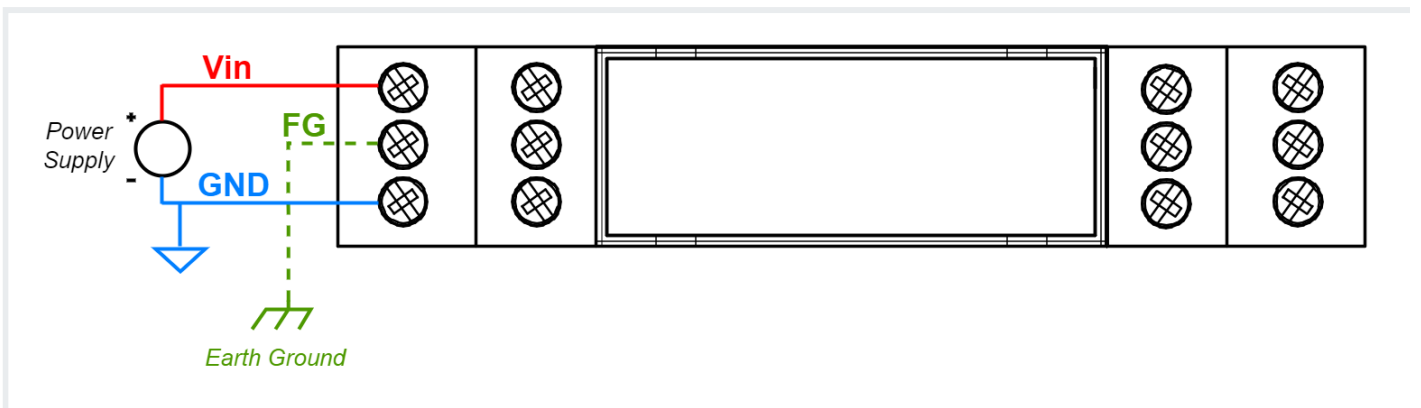

If earth ground is not available FG can be left floating or it can be connected with the power supply GND.

Pin assignments

H01

H01 Three-Way Isolated RS485 HUB

123456789012345

Power: $\overline{\text{---}}$ 12-30V/DC <1W
 \sim 24V/AC
 Temperature: -40°C +75°C
 Interface: 3xRS485
 Baud: up to 115200 bps
 Isolation: 3-side 3kV/DC
 REV1 MADE IN EU

4	A2	8	B2	12	Gnd	16	B1
3	A3	7	B3	11	Gnd	15	A1
2	A4	6	B4	10	FG	14	Gnd1
1	Gnd2	5	Gnd2	9	Vin	13	Gnd1

B1 A1 B2 A2

B3 A3 B4 A4

ON

1 2 3 4 5 6

1 - Port 4 terminator
 2 - Port 3 terminator
 3 - Port 2 terminator
 4 - NC
 5 - NC
 6 - Port 1 terminator

RoHS COMPLIANT

Redisage ELECTRONICS

H02

H02 Isolated RS485 HUB
 A(234) B(234) Isolated Side

123456789012345

Power: $\overline{\text{---}}$ 12-30V/DC <1W
 Temperature: -40°C +75°C
 Interface: 3xRS485
 Baud: up to 115200 bps
 Isolation: Output 3kV/DC
 REV1 MADE IN EU

4	A2	8	B2	12	Gnd	16	B1
3	A3	7	B3	11	Gnd	15	A1
2	A4	6	B4	10	FG	14	Gnd
1	Gnd1	5	Gnd1	9	Vin	13	Gnd

B1 A1 B2 A2

B3 A3 B4 A4

ON

1 2 3 4 5 6

1 - Port 4 terminator
 2 - Port 3 terminator
 3 - Port 2 terminator
 4 - NC
 5 - NC
 6 - Port 1 terminator

RoHS COMPLIANT

Redisage ELECTRONICS

H03

H03 Isolated RS485 HUB
 A1 B1 Isolated Side

123456789012345

Power: $\overline{\text{---}}$ 12-30V/DC <1W
 Temperature: -40°C +75°C
 Interface: 3xRS485
 Baud: up to 115200 bps
 Isolation: Input 3kV/DC
 REV1 MADE IN EU

4	A2	8	B2	12	Gnd	16	B1
3	A3	7	B3	11	Gnd	15	A1
2	A4	6	B4	10	FG	14	Gnd1
1	Gnd	5	Gnd	9	Vin	13	Gnd1

B1 A1 B2 A2

B3 A3 B4 A4

ON

1 2 3 4 5 6

1 - Port 4 terminator
 2 - Port 3 terminator
 3 - Port 2 terminator
 4 - NC
 5 - NC
 6 - Port 1 terminator

RoHS COMPLIANT


Redisage ELECTRONICS

Enclosure dimensions

2U Module Enclosure

98 x 22.5 x 56.4

Units: mm

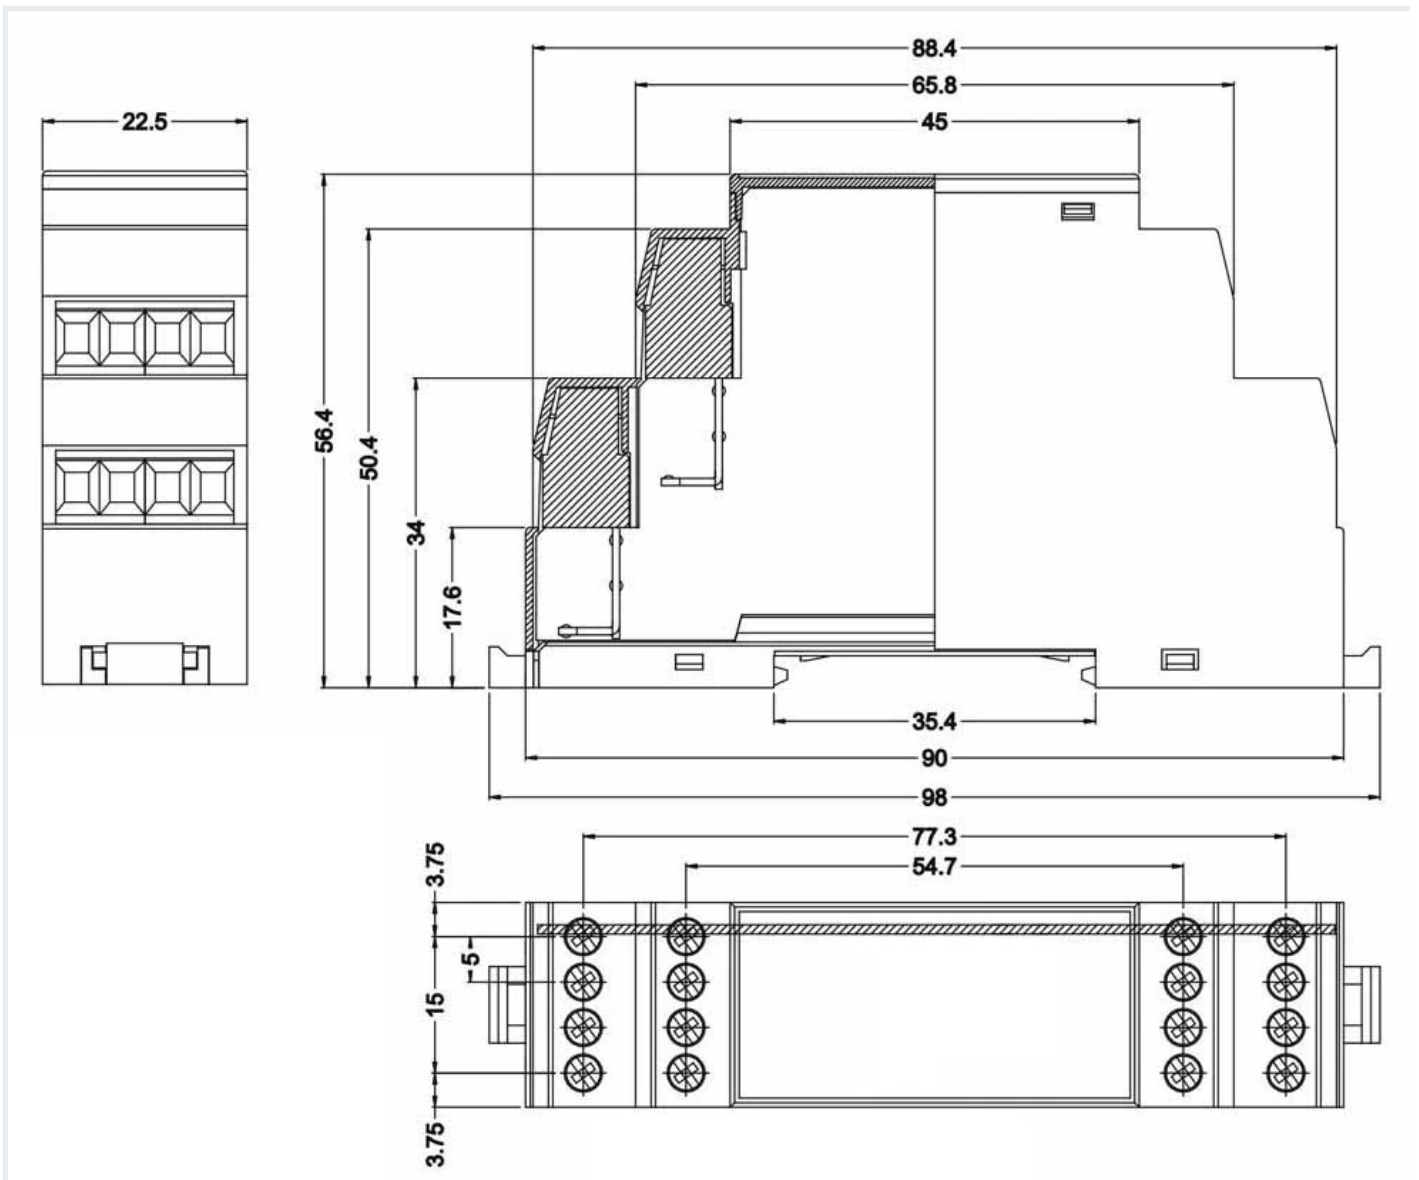

Additional notes

Related information and links

[Ordering information](#)

[Accessories](#)

[Similar products](#)

Products family sample photo



<https://redisage.com>

DISCLAIMER NOTES

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Datasheet-ID:

SR-D

Revision #24

Created 3 April 2024 11:41:10

Updated 26 March 2026 11:12:37 by Michał Grabski