

# Data Sheet

## RS485 HUBs (H01 - H03)

H01 H02 H03



**Features**

- Isolated RS485 1:3 HUB
- ESD protection for the RS485 data line
- Power supply: +12 to +30 VDC or 24 VAC
- 3000 VDC isolation protection
- Transmission speed up to 115200 bps
- Tx, Rx and power LED indicators
- RS485 embedded termination 120 ohm
- Operating temperatures: -40°C to +75°C
- DIN-rail mounting
- Compact size - single module format (1M)
- Dimensions: 90x56.4x17.5 mm
- 3 years warranty
- Customization of OEM is welcomed

## Introduction

The products from the H01-H03 family are reliable RS485 signal hubs made to work with variable transmission speeds. They allow flexible branching of the 1:3 interface while simultaneously protecting the attached devices thanks to internal 3 kV/DC galvanic isolation. Additionally, dedicated EMC protections will improve transmission quality and limit the impact of interference typical for an industrial environment.

## Specifications


Redisage PN	H01	H02	H03			
Input	1 x RS485 channel; Data+, Data-					
Output	3 x RS485 channels; Data+, Data-					

Redisage PN		H01	H02	H03			
Power	Voltage	12-30 VDC / 24 VAC	12-30 VDC				
	Power	< 1 W					
Frame ground protection		yes					
3000 VDC isolation		3-way	branched side	main side			
Baud rate		up to 115200 bps					
LED indicators		communication Tx, Rx and power					
RS485 termination		120 ohm manually enabled					
Connector	RS485	8-pin terminal block max. 2.5 mm <sup>2</sup> wire					
	Power	3-pin terminal block max. 2.5 mm <sup>2</sup> wire					
Transmission distance	RS485	max. 1,200 m at 9.6 kbps; max. 400 m at 115.2 kbps (Belden 9841 2P twisted-pair cable, if different cables are used, the transmission distance may change)					
Mounting and enclosure		DIN rail, plastic PA - UL 94 V0, black/green					
Temperatures		-40°C to +75°C operating and storage					
Humidity		10 - 90% RH, non-condensing					
ESD protection		±4 kV contact discharge / ±8 kV air discharge					
Certification		CE, RoHS, EMC, LVD					
Norms		61000-6-2 - Immunity standard for industrial environments 61000-6-4 - Emission standard for industrial environments					

## Variants


### H01 - THREE-WAY Isolated RS485 HUB

### H01 THREE-WAY Isolated RS485 HUB

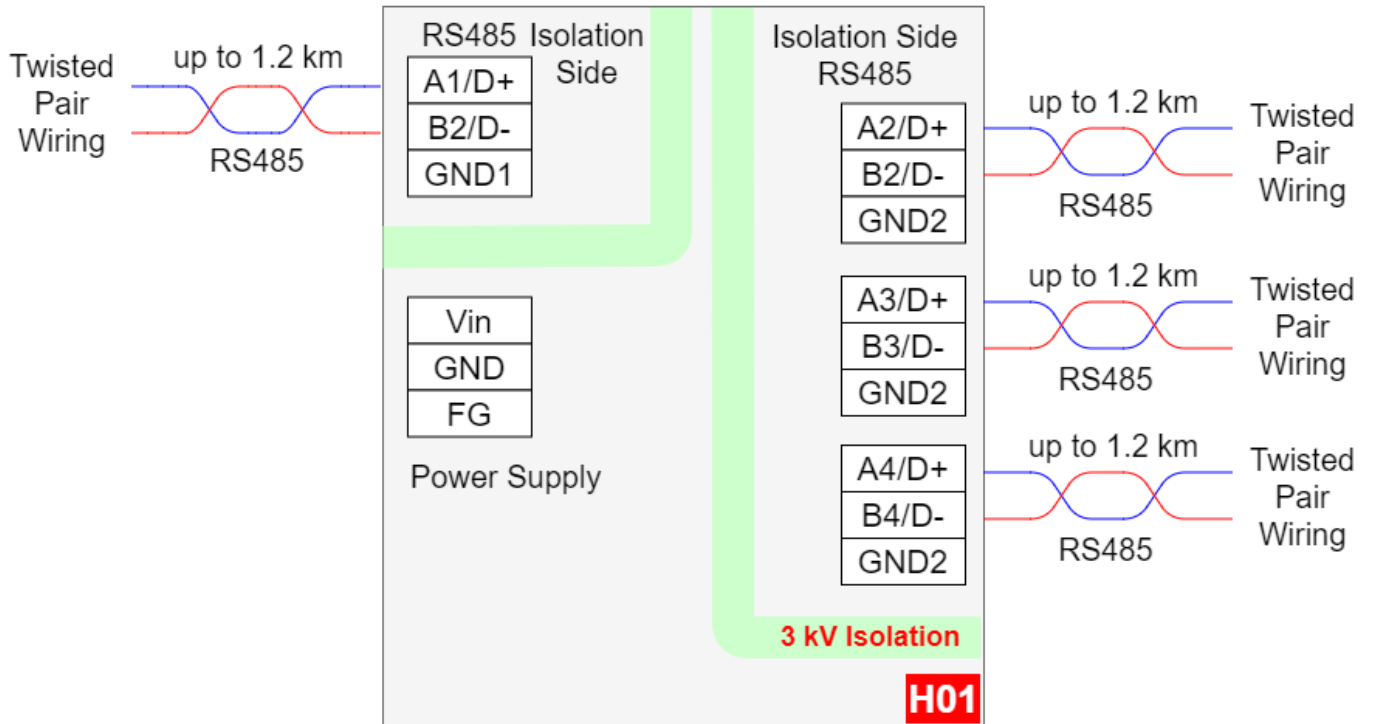


### H02 - Branched Side Isolated RS485 HUB

#### H02 Branched Side Isolated RS485 HUB

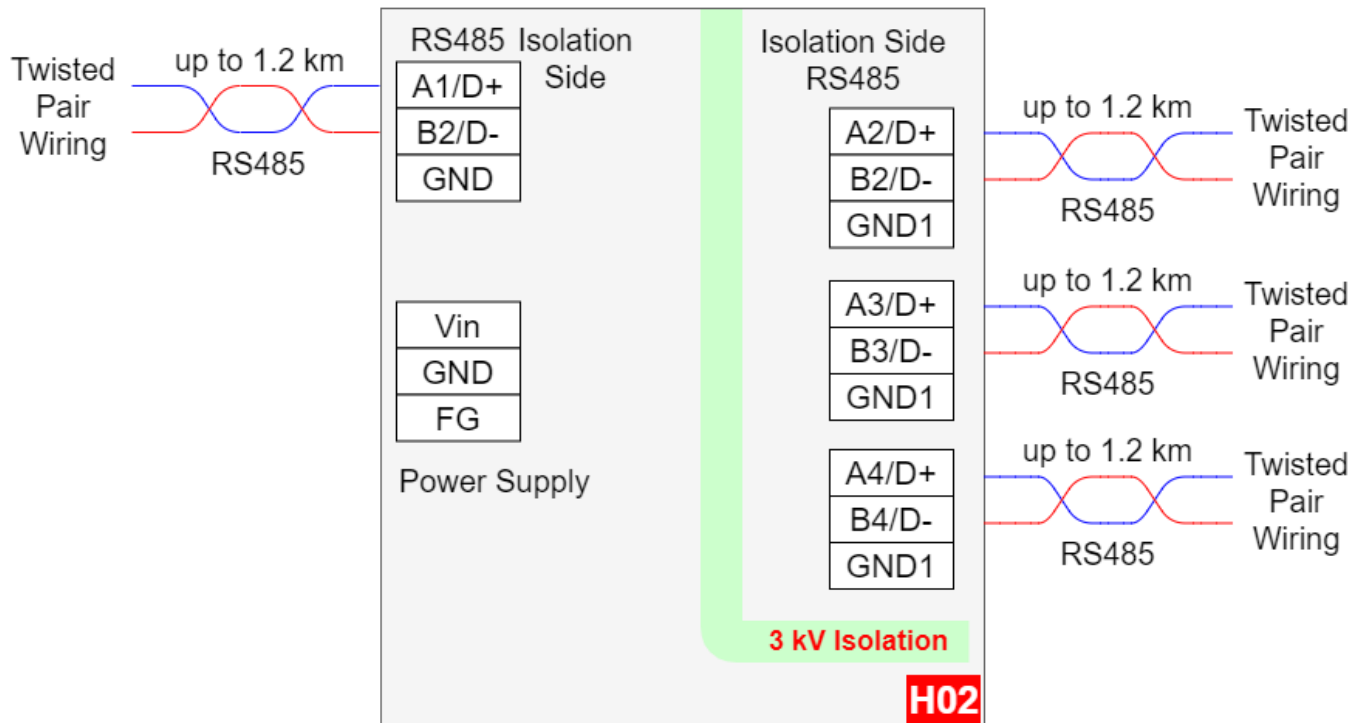


### H03 - Main Side Isolated RS485 HUB

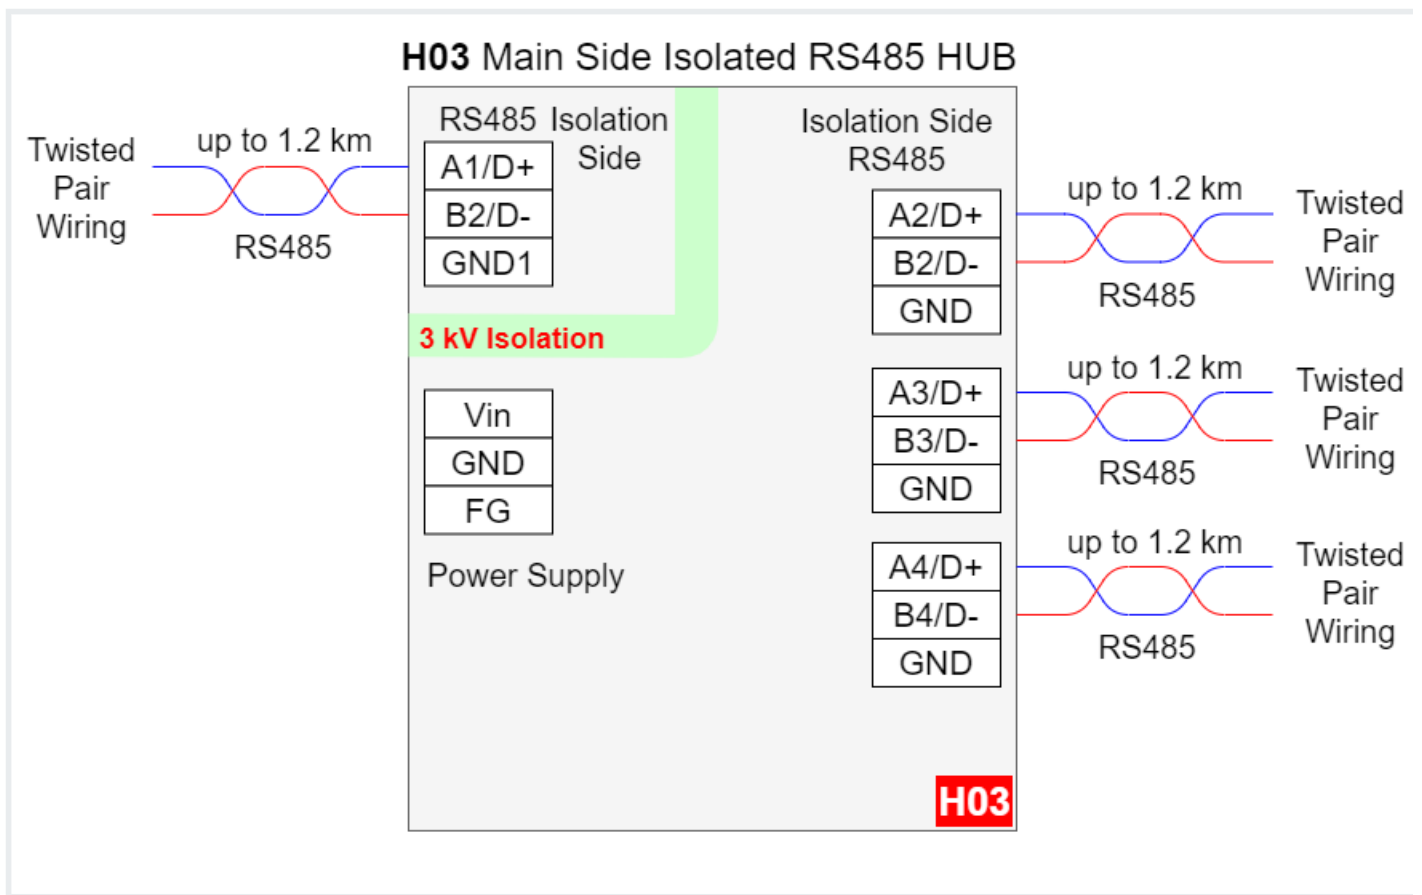

## Frame ground FG

Electronic circuits are constantly prone to electrostatic discharge ESD. Redisage Electronics modules feature a design for the frame ground terminal block FG. The frame ground provides a path for bypassing ESD, which provides enhanced static protection ESD abilities and ensures the module is more reliable. Connecting FG terminal block to the earth ground will bypass the ESD disturbances outside the device so will provide a better level of protection against ESD.

Frame Ground FG connection reference drawing is provided below.

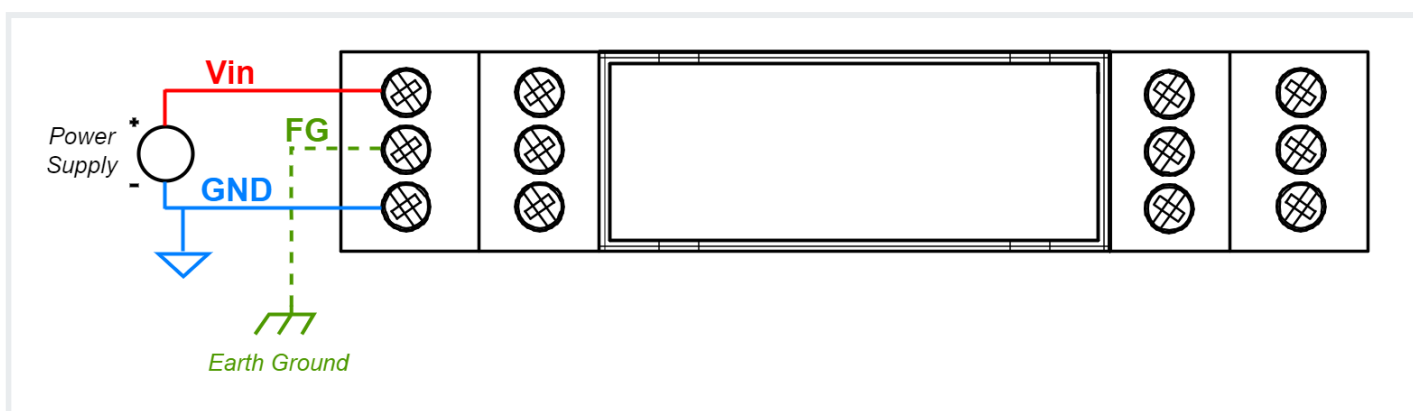

If earth ground is not available FG can be left floating or it can be connected with the power supply GND.

# Pin assignments

H01

H01

Three-Way Isolated RS485 HUB

123456789012345

Power: ---12-30V/DC <1W  
~ 24V/AC

Temperature: -40°C +75°C

Interface: 3xRS485

Baud: up to 115200 bps

Isolation: 3-side 3kV/DC

REV1 MADE IN EU

4 A2	8 B2	12 Gnd	16 B1
3 A3	7 B3	11 Gnd	15 A1
2 A4	6 B4	10 FG	14 Gnd1
1 Gnd2	5 Gnd2	9 Vin	13 Gnd1

B1 A1 B2 A2

6

3

120

120

B3 A3 B4 A4

2

1

120

120

ON

1

2

3

4

5

6

1 - Port 4 terminator

2 - Port 3 terminator

3 - Port 2 terminator

4 - NC

5 - NC

6 - Port 1 terminator

H02

H02

Isolated RS485 HUB  
A(234) B(234) Isolated Side

123456789012345

Power: ---12-30V/DC <1W

Temperature: -40°C +75°C

Interface: 3xRS485

Baud: up to 115200 bps

Isolation: Output 3kV/DC

REV1 MADE IN EU

4 A2	8 B2	12 Gnd	16 B1
3 A3	7 B3	11 Gnd	15 A1
2 A4	6 B4	10 FG	14 Gnd
1 Gnd1	5 Gnd1	9 Vin	13 Gnd

B1 A1 B2 A2

6

3

120

120

B3 A3 B4 A4

2

1

120

120

ON

1

2

3

4

5

6

1 - Port 4 terminator

2 - Port 3 terminator

3 - Port 2 terminator

4 - NC

5 - NC

6 - Port 1 terminator

H03

H03

Isolated RS485 HUB  
A1 B1 Isolated Side

123456789012345

Power: ---12-30V/DC <1W

Temperature: -40°C +75°C

Interface: 3xRS485

Baud: up to 115200 bps

Isolation: Input 3kV/DC

REV1 MADE IN EU

4 A2	8 B2	12 Gnd	16 B1
3 A3	7 B3	11 Gnd	15 A1
2 A4	6 B4	10 FG	14 Gnd1
1 Gnd	5 Gnd	9 Vin	13 Gnd1

B1 A1 B2 A2

6

3

120

120

B3 A3 B4 A4

2

1

120

120

ON

1

2

3

4

5

6

1 - Port 4 terminator

2 - Port 3 terminator

3 - Port 2 terminator


4 - NC

5 - NC

6 - Port 1 terminator

# Enclosure dimensions

1U Module Enclosure  
98 x 17.5 x 56.4  
Units: mm

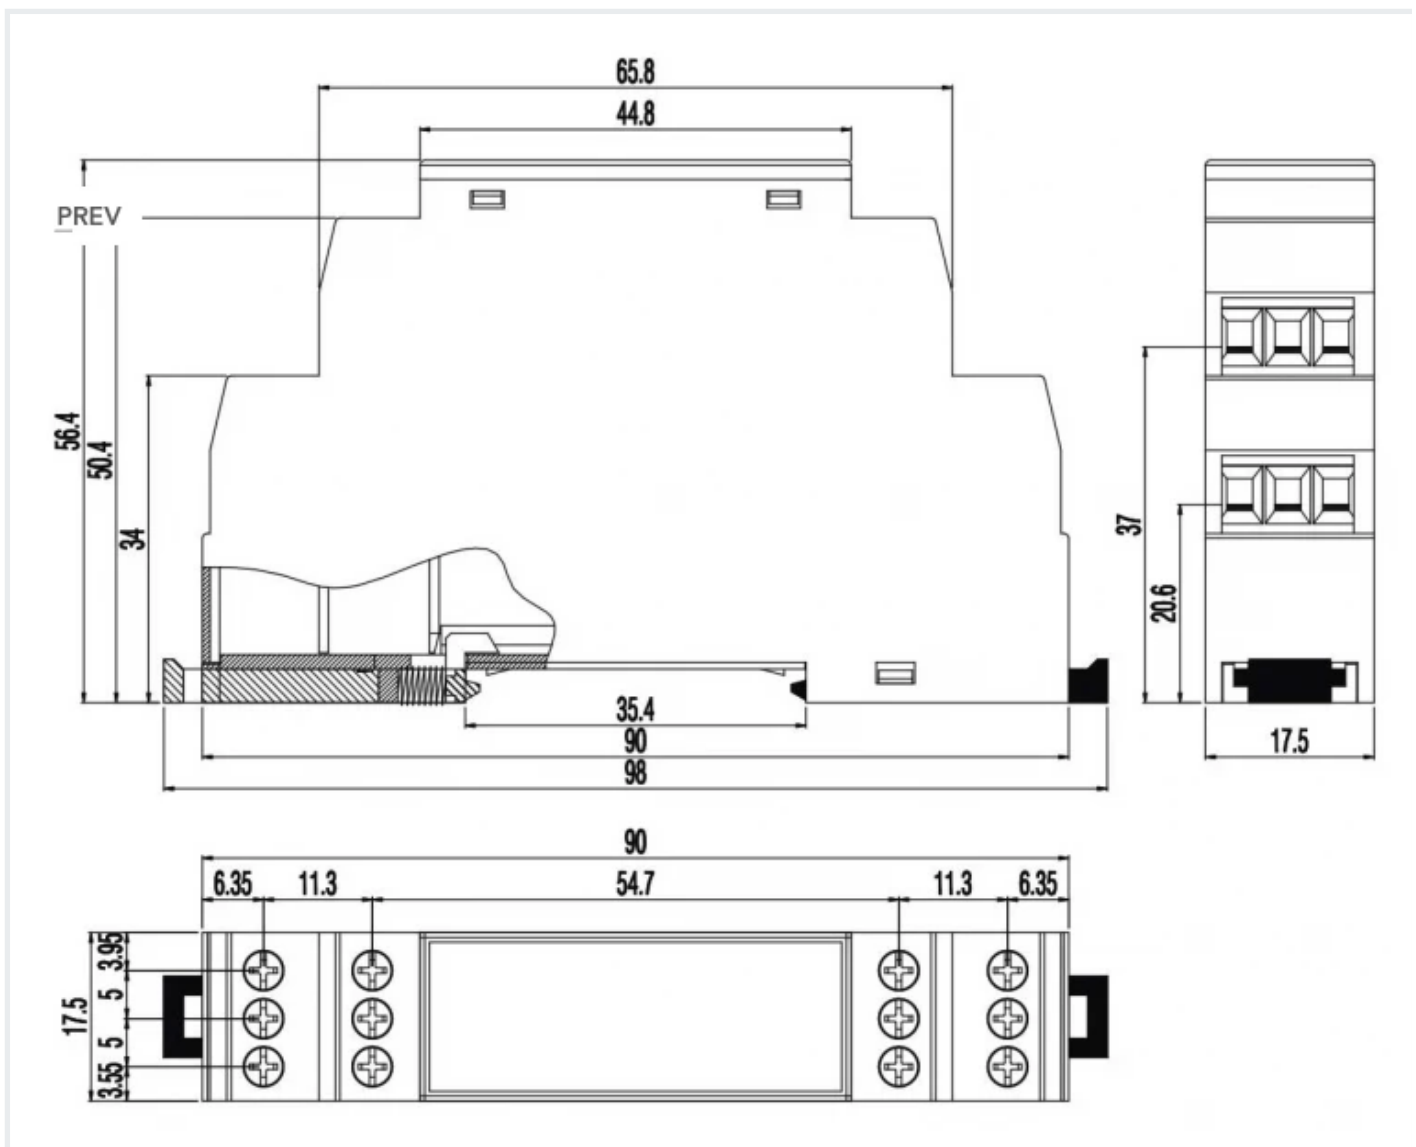

## Additional notes

Related information and links		
<a href="#">Ordering information</a>	<a href="#">Accessories</a>	<a href="#">Similar products</a>

## Products family sample photo



<https://redisage.com>

**DISCLAMER NOTES**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Datasheet-ID:

SR-D

---

Revision #13  
Created 3 April 2024 11:41:10  
Updated 13 May 2025 08:50:25 by Michał Grabski