
Ethernet

STM32 Open IoT and IIoT Gateways (P10 - P12)


Link to repositories:

- C

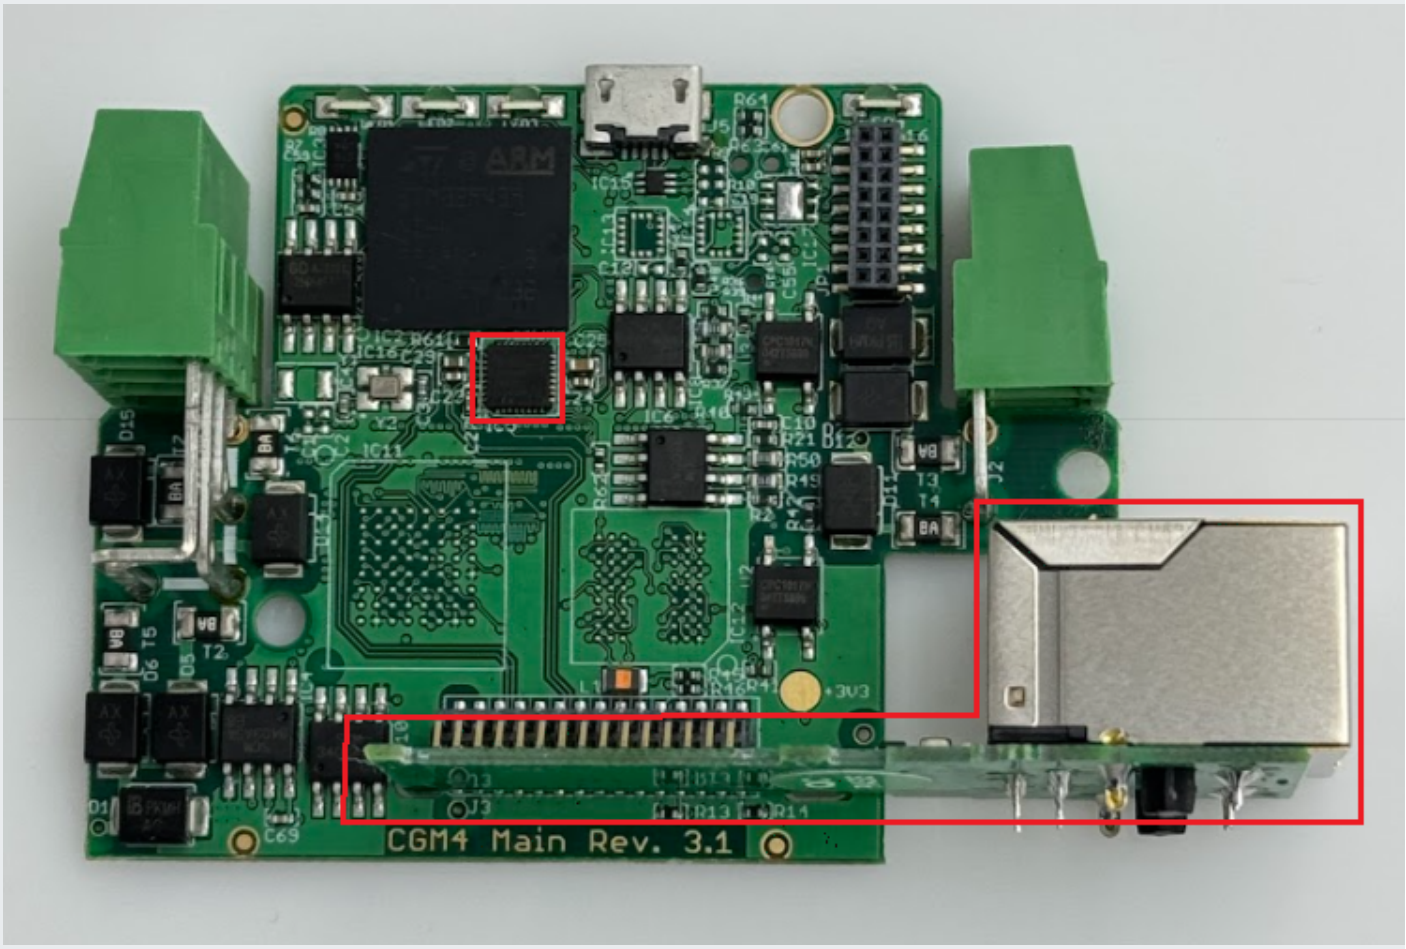

This example allows you to check the Gateway's IP address. Connect the device via USB/UART converter and choose correct COM/ttyUSB port. Remember to connect the IoT Gateway to the network using an Ethernet cable. Type in terminal "ipconfig". If your network connection works

properly, IP address will be displayed as below:

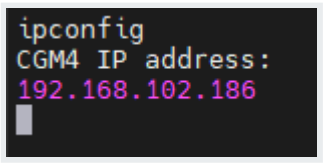

Created 2024-06-20 09:47:41 UTC
Updated 2025-02-07 12:23:52 UTC by Michał Grabski