


# Ethernet

## STM32 Open IoT and IIoT Gateways (P10 - P12)

Link to repositories:

- [C](#)

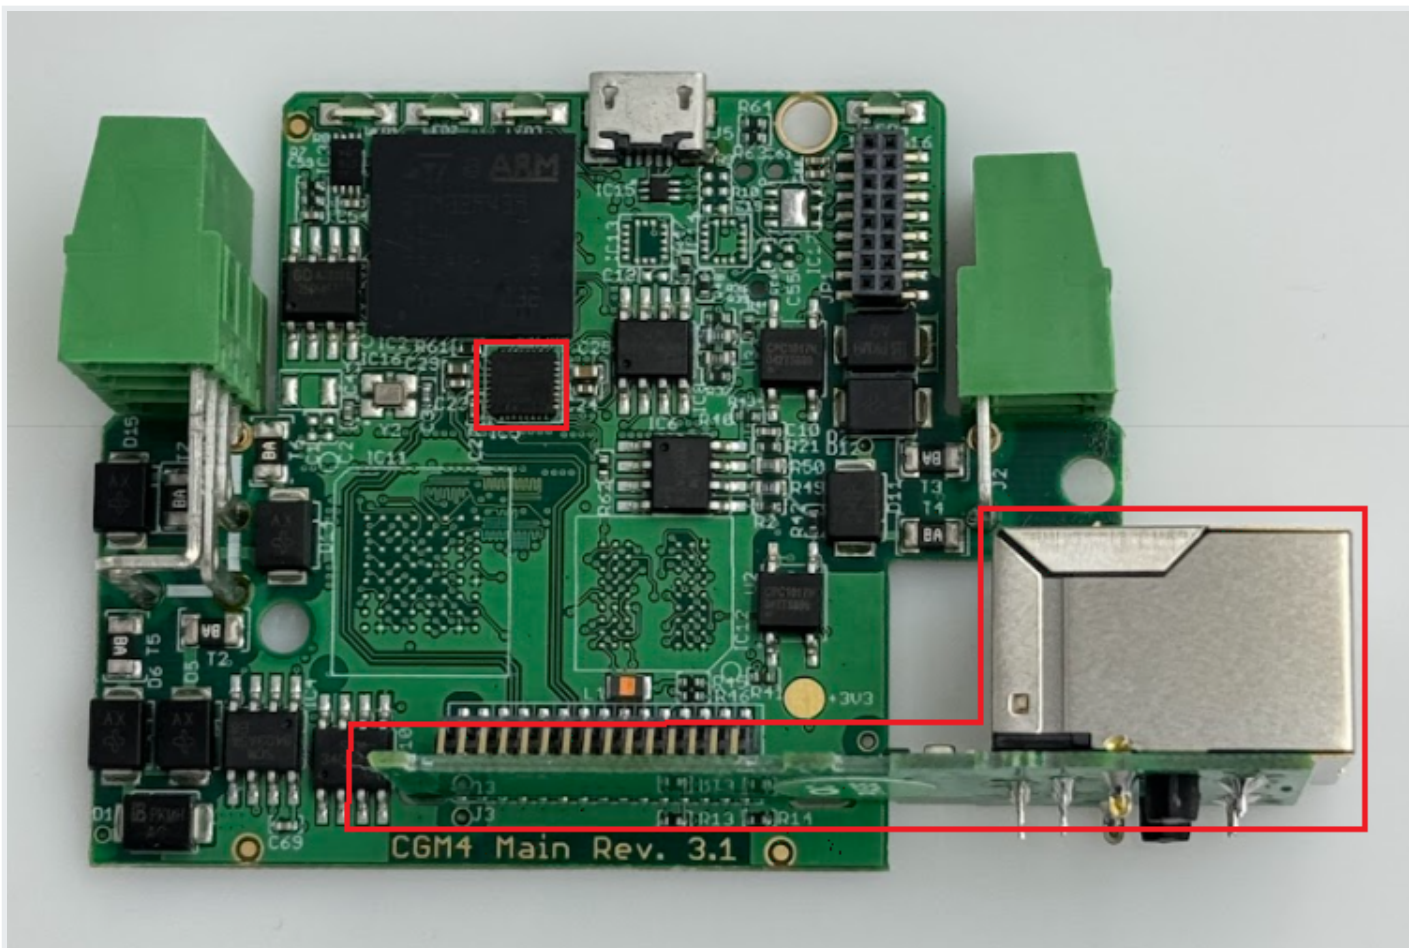

This example allows you to check the Gateway's IP address. Connect the device via USB/UART converter and choose correct COM/ttyUSB port. Remember to connect the IoT Gateway to the network using an Ethernet cable. Type in terminal "ipconfig". If your network connection works

properly, IP address will be displayed as below:

```
ipconfig
CGM4 IP address:
192.168.102.186
█
```

---

Revision #6

Created 20 June 2024 09:47:41

Updated 7 February 2025 12:23:52 by Michał Grabski