
Hello World

STM32 Open IoT and IIoT Gateways (P10 - P12)

Link to repositories:

- C

This example uses UART4 in the MCU which is reserved for the USB UART communication. A simple string is printed on the console and then the device restarts after 10 seconds of countdown. Use 115200 baudrate.

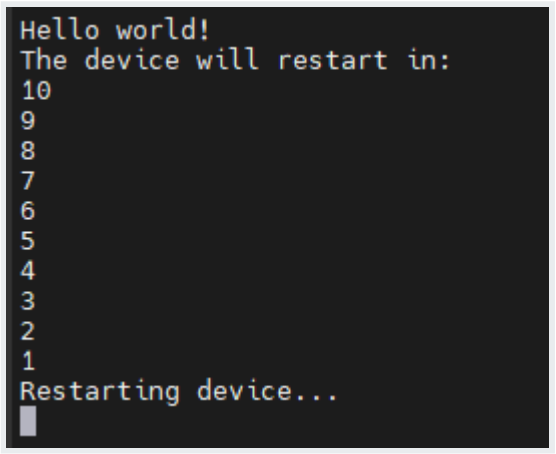

Created 2024-06-20 09:47:40 UTC
Updated 2025-01-31 07:36:09 UTC by Michał Grabski