


Serial Flash

STM32 Open IoT and IIoT Gateways (P10 - P12)

The Gateway has a Serial flash memory which can be programmed via SPI.

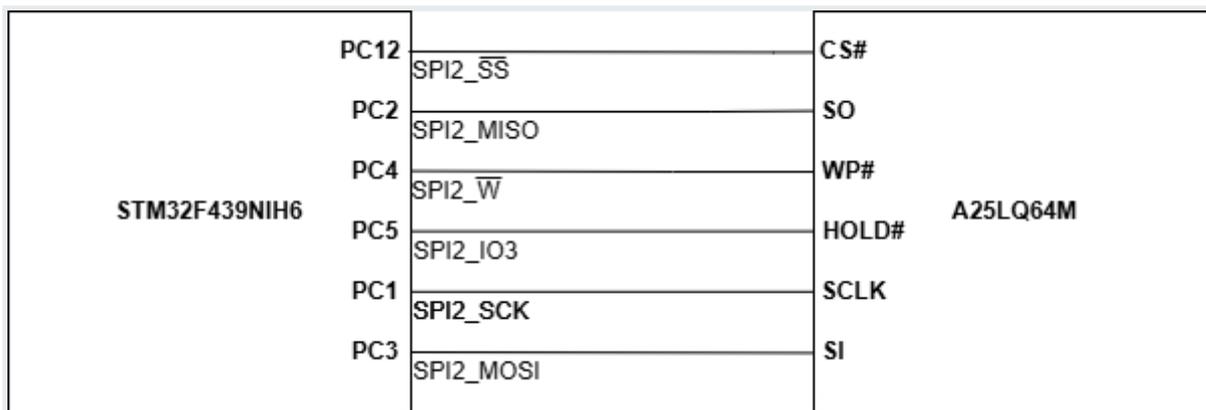

Revision #7

Created 20 June 2024 09:47:40 by Jan Górski

Updated 24 January 2025 12:08:50 by Michał Grabski