


# USB FTDI ESP32 Programmer Data Sheet

## USB RS232 RS485 Converters (P03)

ESP32 USB Programmer for P01 and P02 Open IoT and IIoT Gateways. It can be used to connect a gateway to a PC via a microUSB and a TAG-Connect cable.

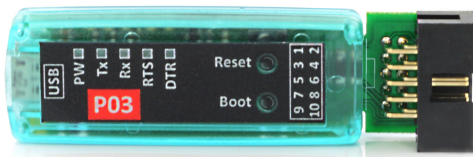


### Features

- USB to TAG-Connect converter
- ESD protection
- Tx, Rx, RTS, DTR and power LED indicators
- Operating temperatures: -40°C to +75°C
- Compact size
- 3 years warranty
- Customization of OEM is welcomed

## Variants

P03 USB Programmer for ESP32

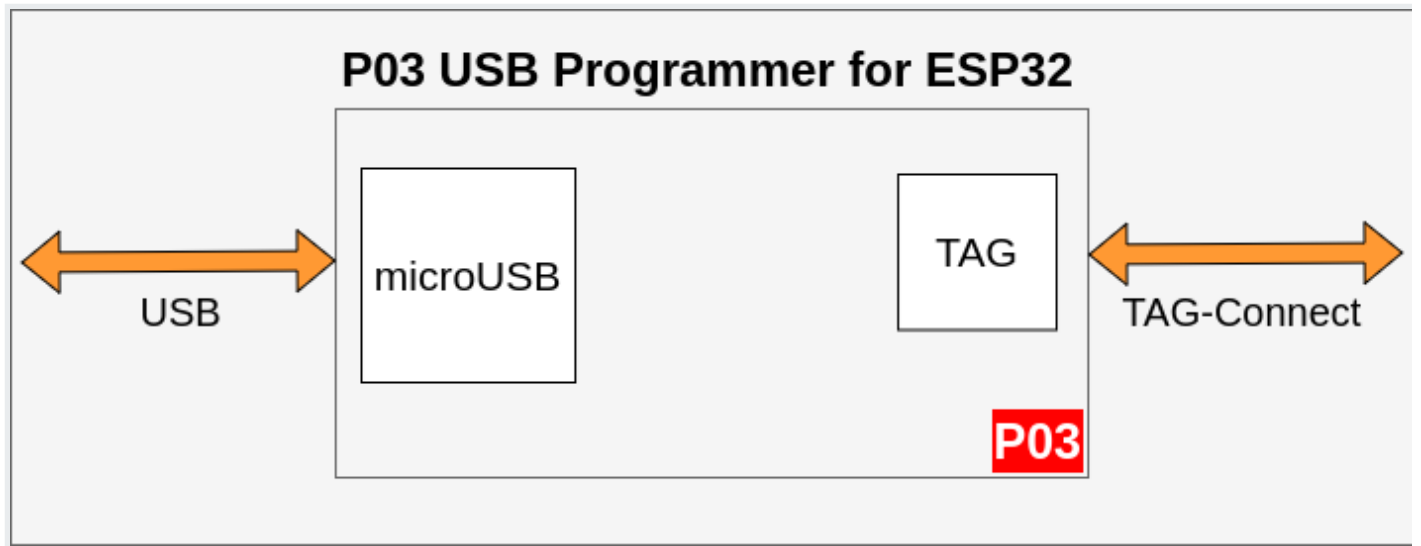


## Enclosure dimensions

Compact USB Enclosure

55.4 x 20.3 x 11.85

Units: mm

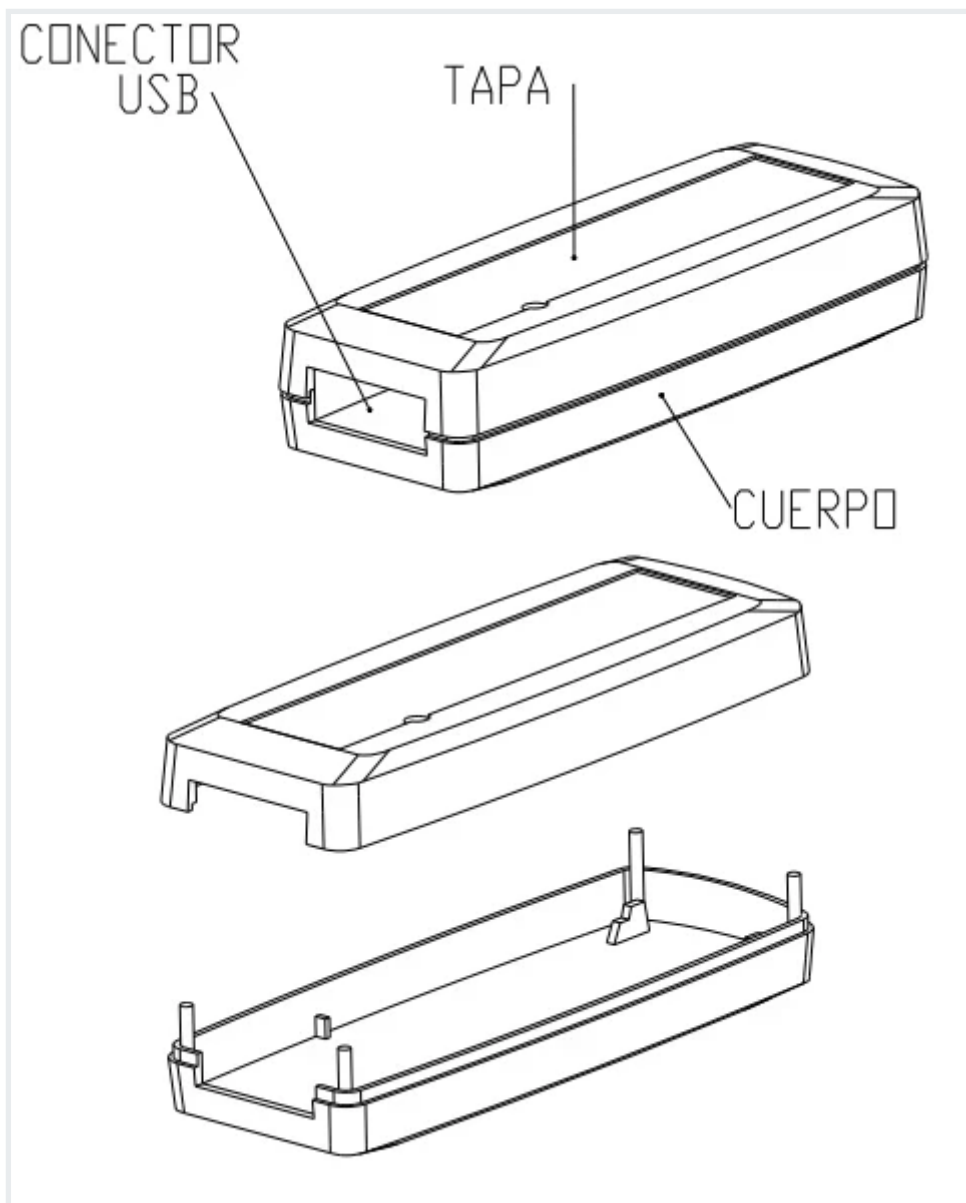

## Additional notes

Related information and links		
<a href="#">Ordering information</a>	<a href="#">Accessories</a>	<a href="#">Similar products</a>

## Products family sample photo



<https://redisage.com>

## **DISCLAMER NOTES**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

# Datasheet-ID:

SR-D

---

Revision #9

Created 15 May 2024 12:52:04 by Jan Górski

Updated 26 July 2024 14:39:07 by Jan Górski